



(11) **EP 1 424 042 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
21.03.2007 Bulletin 2007/12

(51) Int Cl.:
A61B 17/15 ^(2006.01)

(21) Application number: **03257497.2**

(22) Date of filing: **27.11.2003**

(54) **Apparatus for achieving correct limb alignment in unicondylar knee arthroplasty**

Vorrichtung zum Ausrichten des Beines für eine unikondylare Arthroplastie des Knies

Appareil pour réaliser la correction de l'alignement d'une jambe lors d'une arthroplastie unicondylienne du genou

(84) Designated Contracting States:
CH DE ES FR GB IT LI

(30) Priority: **27.11.2002 US 305697**

(43) Date of publication of application:
02.06.2004 Bulletin 2004/23

(73) Proprietor: **Zimmer Technology, Inc.**
Chicago,
Illinois 60606 (US)

(72) Inventors:
• **Hodorek, Robert A.**
East Warsaw
IN 46580 (US)
• **Farling, Toby N.**
Ct. Warsaw
IN 46580 (US)

- **Sanford, Adam H.**
Warsaw
IN 46580 (US)
- **Williamson, Richard V.**
WA 98221 (US)
- **Saenger, Paul V.**
Asheville NC 28801 (US)

(74) Representative: **Mays, Julie**
Barker Brettell,
10-12 Priests Bridge
London SW15 5JE (GB)

(56) References cited:

FR-A- 2 648 699	FR-A- 2 819 168
US-A- 4 524 766	US-A- 4 566 448
US-A- 4 825 857	US-A- 4 938 762
US-A- 5 116 338	US-A- 5 688 280
US-A1- 2002 198 530	

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 424 042 B1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention.

[0001] The present invention relates to unicondylar knee arthroplasty, and, more particularly, to an apparatus for achieving correct limb alignment and linking the distal femoral cut to the proximal tibial cut in unicondylar knee arthroplasty, including minimally invasive unicondylar knee arthroplasty.

2. Description of the Related Art.

[0002] Orthopedic procedures for the replacement of all, or a portion of, a patient's joint have been developed over the last thirty years. Currently, the procedures used to prepare the bone and seat the implants are generally referred to as open procedures. For the purposes of this discussion, the term "open procedure" will refer to a procedure wherein an incision is made through the skin and underlying tissue to fully expose a large portion of the particular joint surface. In both total and unicondylar knee arthroplasty, the typical incision for an open procedure is about 8-10 inches long. After the initial incision in the skin, the internal wound may be enlarged to fully expose the areas to be prepared. While this approach provides surgeons with an excellent view of the bone surface, the underlying damage to the soft tissue, including the muscles can lengthen a patient's rehabilitation time after surgery. While the implants may be well fixed at the time of surgery, it may be several weeks or perhaps months before the tissues violated during surgery are fully healed.

[0003] Unicompartmental knee arthroplasty is typically utilized to correct a varus or a valgus deformity caused by, e.g., osteoarthritis affecting the medial (a varus deformity) or lateral (a valgus deformity) compartment of the knee. Traditionally, unicondylar knee arthroplasty is an open procedure in which a surgeon, after exposing the knee, resects diseased or otherwise undesirable bone from the appropriate compartment of the knee, including portions of the distal femur and the proximal tibia. The distal femur and proximal tibia of the affected compartment are also shaped to receive a unicondylar knee prosthesis.

[0004] In traditional unicondylar knee arthroplasty, leg alignment requires a trial and error technique in which the surgeon makes one of the distal femoral cut and the proximal tibial cut and thereafter selects the location of the other of the distal femoral cut and the proximal tibial cut based on experience and the knowledge that tibial prostheses are available in a limited number of thicknesses. Typically, the proximal tibial cut is made so as to remove the least amount of the proximal tibia, while ensuring sufficient removal of diseased or otherwise undesirable bone. The remaining femoral cuts are made to complete shaping of the femur to receive a femoral prosthe-

sis. After the femoral and tibial cuts are complete, the femoral prosthesis and the tibial prosthesis, or provisional versions thereof, are temporarily implanted and leg alignment is reviewed by the surgeon. If the tibial prosthesis does not include an integral bearing component, then a discrete bearing component is also implanted. To adjust leg alignment, the surgeon can replace the tibial prosthesis, or bearing component with an alternative tibial prosthesis, or bearing component having an increased or decreased thickness. The surgeon may also recut the femur and/or use a different femoral implant to achieve appropriate leg alignment. The surgeon can also remove more tibial bone stock and again use the previously used tibial prosthesis, or replace the previously used tibial prosthesis with a tibial prosthesis of a different thickness. This procedure of trial and error is conducted until the surgeon believes that appropriate leg alignment and soft tissue tension has been achieved.

[0005] The traditional trial and error technique utilized in performing unicompartmental knee arthroplasty is tedious and time consuming, and may result in excessive removal of tibial and/or femoral bone. One alternative prior art technique utilizes a spacing mechanism to extend the spacing in the compartment of the knee receiving the unicondylar knee prosthesis. In this prior art technique, the compartment spacing is extended until the surgeon is happy with limb alignment.

The device used to extend the knee compartment is used as a reference for a cut block through which the distal femur and proximal tibia are cut with the knee in full extension. This technique is unfavourable because many surgeons do not want to cut the tibia when the knee is in full extension for fear of damaging the popliteal structures behind the knee that are close to the bone when the knee is in full extension. When the knee is placed in flexion, the popliteal structures are drawn away from the bone to provide additional room for error in cutting the proximal tibia without damaging the popliteal structures. US 4 524 766 (The preamble of claim 1 is based on this document.), FR 2 819 168 and US 4 566 448 disclose apparatus for performing knee arthroplasty.

[0006] What is needed in the art is a minimally invasive apparatus for creating correct limb alignment in unicondylar knee arthroplasty.

[0007] What is additionally needed in the art is a cut guide apparatus through which distal femoral and proximal tibial cuts having a predetermined spacing can be made and which allows for resection of the proximal tibia in flexion.

SUMMARY OF THE INVENTION

[0008] The apparatus of the present invention enables a minimally invasive procedure for creating correct limb alignment in unicondylar knee arthroplasty. Depending on which compartment of the knee is receiving a prosthesis, either a medial, or a lateral parapatellar incision is made to expose the knee joint. The incision used with

the apparatus of the present invention is smaller than the incision of the traditional open procedure. After developing the wound, the anterior tibial boss of the relevant compartment of the knee is resected and an adjustable alignment block in accordance with the present invention is inserted into the relevant compartment of the knee.

[0009] The apparatus of the present invention is defined in the claims. The adjustable alignment block of the present invention may include a femoral paddle for contacting the femur and a tibial paddle for contacting the tibia. In use, the femoral and tibial paddles are inserted into the relevant compartment of the knee after removal of the anterior tibial boss.

[0010] The adjustable alignment block of the present invention includes a femoral cut slot through which the distal femoral cut is made. The femoral cut slot is spaced from the femoral paddle a predetermined distance to allow for removal of the appropriate amount of femoral bone stock. With the knee in flexion, and with the femoral cut block secured to the tibia and femur, an oscillating saw or other appropriate instrument is utilized to resect the distal femur. After resection of the distal femur, the adjustable alignment block is removed, leaving a pair of headless securing devices which were used to secure the adjustable alignment block to the tibia. The headless securing devices are spaced a predetermined distance from the femoral cut slot and serve as a reference for linking the distal femoral cut to the proximal tibial cut.

[0011] A tibial cut block of the present invention is now used to resect the proximal tibia. The tibial cut block of the present invention includes a number of hole pairs sized and spaced to accommodate insertion of the headless securing devices therein. Each of the hole pairs of the tibial cut block correspond to a different implant thickness. The tibial cut block also includes a tibial cut slot through which the proximal tibial cut can be made. The tibial cut is attached to the tibia by positioning the headless securing devices into the appropriate hole pair for the desired implant, and, after making the sagittal cut in the proximal tibia, the horizontal tibial cut is made through the tibial cut slot.

[0012] An advantage of the present invention is the ability to perform a unicompartmental knee arthroplasty while facilitating patient recovery due to the minimally invasive nature of the technique disclosed herein.

[0013] A further advantage of the present invention is the establishment of predetermined alignment and soft tissue balance ensuring accurate component positioning through linked parallel bone cuts on the distal femur and proximal tibia.

[0014] Another advantage of the present invention is the ability to link bone cuts on the distal femur and proximal tibia while allowing resection of the proximal tibia in flexion.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The above-mentioned and other features and

advantages of this invention, and the manner of attaining them, will become more apparent and the invention itself will be better understood by reference to the following description of an embodiment of the invention taken in conjunction with the accompanying drawings, wherein:

[0016] Figure 1 is a schematic depiction of a healthy knee joint having a neutral mechanical axis;

[0017] Figure 2 is a schematic depiction of a knee joint having a varus deformity;

[0018] Figure 3 is a schematic depiction of a patient's leg illustrating the incision required to perform a medial compartment unicompartmental knee arthroplasty in accordance with the present invention;

[0019] Figure 4 is a schematic depiction illustrating the bones, ligaments, and muscles of the knee area and further illustrating the capsular incision required for performing a medial compartment unicompartmental knee arthroplasty in accordance with the present invention;

[0020] Figure 5 is a perspective view illustrating use of an oscillating saw to resect the anterior tibial boss in the affected compartment of the knee;

[0021] Figure 6 is a perspective view of an adjustable alignment block of the present invention in an open position;

[0022] Figure 7 is a perspective view of the adjustable alignment block of Figure 6 illustrated in a closed position;

[0023] Figure 8 is a bottom elevational view of the adjustable alignment block of Figures 6 and 7 illustrated in a closed position;

[0024] Figures 9 and 10 are side plan views of the adjustable alignment block of Figures 6-8 illustrated in the closed and open positions, respectively;

[0025] Figure 11 is a distal elevational view of the adjustable alignment block of Figures 6-10;

[0026] Figure 12 is a top elevational view of the adjustable alignment block of Figures 6-11;

[0027] Figure 13 is a perspective view illustrating inserting the adjustable alignment block of Figures 6-12 into a knee joint to facilitate correction of a varus deformity;

[0028] Figure 14 is a perspective view of the adjustable alignment block of Figures 6-12, with a minus 2 millimeter femoral spacer secured thereto;

[0029] Figures 15-17 are side, top, and end views, respectively of an alignment tower;

[0030] Figure 18 is a sectional view thereof taken along line 18-18' of Figure 16;

[0031] Figure 19 is a partial perspective view of the knee joint of Figure 13, with an adjustable alignment block positioned therein, and with an alignment tower as well as femoral and tibial alignment rods secured to the adjustable alignment block;

[0032] Figure 20 is a plan view illustrating use of the alignment device of the present invention to facilitate correction of limb alignment in a joint having a varus deformity;

[0033] Figures 21-24 are top, side, first end, and second end views of a distal telescoping rod;

[0034] Figure 25 is an end plan view of an ankle clamp;
 [0035] Figure 26 is a top plan view thereof;
 [0036] Figure 27 is a sectional view thereof taken along line 27-27' of Figure 26;
 [0037] Figure 28 is a side plan view of a minus 2 millimeter femoral spacer of the present invention;
 [0038] Figure 29 is a top plan view thereof;
 [0039] Figure 30 is a bottom plan view thereof;
 [0040] Figure 31 is a sectional view thereof taken along line 31-31' of Figure 30;
 [0041] Figure 32 is a top plan view of a tibial cut block of the present invention;
 [0042] Figure 33 is a bottom plan view thereof;
 [0043] Figure 34 is a sectional view thereof taken along line 34-34' of Figure 32;
 [0044] Figure 35 is a top plan view of a targeting guide;
 [0045] Figure 36 is a side view thereof;
 [0046] Figure 37 is an end view thereof;
 [0047] Figure 38 is a perspective view illustrating use of a reciprocating saw to make the sagittal cut in the relevant knee compartment; and
 [0048] Figure 39 is a perspective view illustrating use of an oscillating saw to resect the proximal tibia.
 [0049] Corresponding reference characters indicate corresponding parts throughout the several views. The exemplification set out herein illustrates one preferred embodiment of the invention, in one form, and such exemplification is not to be construed as limiting the scope of the invention in any manner.

DETAILED DESCRIPTION OF THE INVENTION

[0050] The description that follows refers to a medial compartment unicondylar knee arthroplasty. While described with respect to a medial compartment unicondylar knee arthroplasty, the principles of the present invention can be applied to the lateral compartment, although a slightly longer incision may be necessary when replacing the lateral compartment of the knee. Preoperative Planning

[0051] Prior to performing a unicondylar knee arthroplasty with the apparatus in accordance with the present invention, weight bearing anterior/posterior and lateral radiographs of the affected knee should be taken. Further, a supine anterior/posterior radiograph showing the center of the femoral head, the knee, and as much of the tibia as possible, preferably including the ankle, should be taken. On this last X-ray, the surgeon can draw a line from the center of the femoral head to the center of the distal femur at the knee and draw a second line down the center of the tibial shaft. The angle formed by these two lines represents the angle of deformity ∇ as illustrated in Figure 2.

[0052] Figure 2 schematically illustrates knee joint 24 having a varus deformity. As illustrated in Figure 2, line 20' drawn from the center of femoral head 16' to the center of distal femur 18' at knee 24 forms an angle ∇ with line 22' drawn down the center of the shaft of tibia 12'.

This angle ∇ represents the angle of varus deformity of knee joint 24. Figure 1 illustrates healthy knee joint 14. As illustrated in Figure 1, line 20 drawn from the center of femoral head 16 to the center of distal femur 20 at knee 14 is colinear with line 22 drawn down the center of the shaft of tibia 12, representing a knee joint without deformity. If the angle of deformity ∇ is 15 degrees or greater, the patient is likely not a candidate for unicompartmental knee arthroplasty.

[0053] With the patient in supine position, the ankle area is wrapped with an elastic wrap and accessibility of the proximal femur is checked. The proximal femur must be accessible to allow for assessing the femoral head location which is used to determine the angle of deformity ∇ as illustrated in Figure 2 and discussed above. At this point, anatomic landmarks may be utilized to identify the location of the femoral head. In one exemplary embodiment, a marker such as an EKG electrode can be positioned over the center of the femoral head to serve as a reference point. In one exemplary embodiment, the location of the femoral head is confirmed with an anterior/posterior radiograph.

Surgical Procedure

[0054] Referring to Figure 3, incision 28 is made in patient leg 26 to expose the knee joint. Incision 28 can be made in flexion or extension according to surgeon preference. Incision 28 is, in the exemplary embodiment disclosed, a medial parapatellar incision extending six to ten centimeters from the superior pole of the patella to about two centimeters below the joint line adjacent to the tibial tubercle as illustrated in Figure 3. If a lateral compartment unicondylar knee arthroplasty is being performed, the incision is a lateral parapatellar incision extending from the superior pole of the patella to about 2 centimeters below the joint line adjacent to the tibial tubercle. Note that Figures 3 and 4 illustrate a right knee, while the remaining figures of this document illustrate a left knee. This procedure is, of course, applicable to both the right and left knees.

[0055] After making incision 28, the wound is developed to expose the joint capsule. Referring to Figure 4, capsular incision 30 is made in the joint capsule distal to the vastus medialis in line with incision 28 to a point that exposes the anterior margin of the femoral condyle as illustrated in Figure 4. The fat pad may be excised to facilitate visualization of the knee joint. The soft tissue is now reflected subperiosteally from the tibia along the joint line toward, but not into, the collateral ligament. In the exposed knee compartment, a portion of the anterior meniscus is removed. In one exemplary embodiment, about one third of the anterior meniscus is removed. The remainder of the meniscus will be removed after resection of the distal femur and proximal tibia.

[0056] The joint is now debrided and intercondylar osteofites are removed to avoid impingement with the tibial spine or cruciate ligament. Furthermore, peripheral os-

teofites interfering with the collateral ligaments and capsule are removed. For example, with medial compartment disease, osteofites are commonly found on the lateral aspect of the tibial eminence.

[0057] Referring to Figure 5, with the knee flexed, oscillating saw 32 is inserted into the exposed knee compartment and applied to tibia 12' with oscillating saw blade 36 operating to resect anterior tibial boss 34. The knee is then placed in full extension with a towel positioned under the ankle to help maintain the knee in full extension. In this position, leg alignment is passively corrected, i.e., corrected until visually appearing to be correct.

[0058] Referring to Figure 13, adjustable alignment block 38 (further illustrated in Figures 6-12) is next positioned with femoral paddle 42 (Figure 7) positioned between the medial femoral condyle and the portion of the tibia from which anterior tibial boss 34 is removed. Prior to insertion of adjustable alignment block 38, tibial paddle 44 is positioned in the closed position as illustrated in Figures 7 and 9.

[0059] Referring to Figures 8-12, adjustable alignment block 38 includes body 39 having femoral paddle 42 extending therefrom. As illustrated in Figure 11, femoral paddle 42 includes opposing spacer bevels 64 and spacer slot 62. Spacer bevels 64 and spacer slot 62 are utilized in conjunction with minus 2 millimeter femoral spacer 56 as further described hereinbelow. Opposite femoral paddle 42, alignment tower boss 54 extends from body 39 of adjustable alignment block 38. Body 39 includes apertures 46, 48 formed therein for affixing adjustable alignment block 38 to the femur and tibia as is further described hereinbelow. Body 39 of adjustable alignment block 38 further includes femoral cut slot 40 through which the distal femoral cut will be made as further described hereinbelow.

[0060] Adjustable alignment block 38 further includes tibial paddle groove 50 in which tibial paddle 44 is positioned. Tibial paddle groove 50 guides movement of tibial paddle 44 between the closed position of adjustable alignment block 38 illustrated in Figures 7 and 9 to the open position thereof illustrated in Figures 6 and 10. As illustrated in Figure 8, threaded shaft 60 is rotatably positioned in an elongate aperture of body 39 of adjustable alignment block 38. Tibial paddle actuation knob 52 is secured to threaded shaft 60 and extends from body 39 of adjustable alignment block 38 to allow for actuation of threaded shaft 60. Tibial paddle 44 includes an end positioned between adjacent threads of threaded shaft 60 so that rotation of tibial paddle actuation knob 52, which causes rotation of threaded shaft 60 actuates tibial paddle 44 between the opened and closed positions.

[0061] Adjustable alignment block 38 illustrated herein is a left medial/right lateral adjustable alignment block. An alternative alignment block can be utilized for a right medial unicondylar knee arthroplasty and a left lateral unicondylar knee arthroplasty. Such an alternative alignment block will be a mirror image of alignment block 38

illustrated herein. Referring to Figure 12, the mirror image alignment block would include tibial affixment apertures 46 positioned to the left of tibial paddle actuation knob 52. Furthermore, in the alternative embodiment adjustable alignment block, femoral cut slot 40 would extend further to the left of tibial paddle actuation knob 52 from the perspective of Figure 12.

[0062] If the joint is too tight to allow insertion of femoral paddle 42 of adjustable alignment block 38 into knee 24 as described above, additional anterior tibial bossing should be removed, as described with reference to Figure 5, to create more space for inserting alignment block 38. Patellar osteofites can be removed for better exposure. Advantageously, the technique does not require movement of the patella. Adjustable alignment block 38 will be used to hold the joint in proper alignment and will further be used as a resection guide when making the distal femoral cut as is fully described hereinbelow.

[0063] If there is significant erosion of the femoral condyle, two millimeters less bone may be resected from the distal femoral condyle. In such a case, minus two millimeter distal femoral spacer 56 (Figures 28-31) will be positioned atop femoral paddle 42 of adjustable alignment block 38 as illustrated in Figure 14. With minus two millimeter distal femoral spacer 56 attached to femoral paddle 42 of adjustable alignment block 38, femoral cut slot 40 will be moved two millimeters distally with respect to distal femur 18' from the position illustrated in Figure 13, i.e., a position in which minus two millimeter distal femoral spacer 56 is not secured to femoral paddle 42 of adjustable alignment block 38. Therefore, two millimeters less femoral bone will be resected when an oscillating saw is positioned through femoral cut slot 40 when minus two millimeter distal femoral spacer is utilized.

[0064] Minus 2 millimeter femoral spacer 56 is illustrated in detail in Figures 28-31. As illustrated in Figure 28, minus 2 millimeter femoral spacer 56 has height H measuring 2 millimeters. With this in mind, with minus 2 millimeter femoral spacer 56 positioned atop femoral paddle 42 as illustrated in Figure 14, cut slot 40 will be moved 2 millimeters distally along femur 18' relative to its position when adjustable alignment block 38 is positioned in knee joint 24 without minus 2 millimeter femoral spacer 56.

[0065] Femoral spacers of varying heights may be utilized to adjust the depth of the distal femoral resection. Minus 2 millimeter femoral spacer 56 is illustrated in detail in Figures 28-31. As illustrated in Figure 31, femoral spacer 56 includes dovetails 84 extending from a lower surface thereof to effect securement of distal femoral spacer 56 to femoral paddle 42 of adjustable alignment block 38. As illustrated in Figure 11, femoral paddle 42 of adjustable alignment block 38 includes opposing spacer bevels 64 which facilitate expansion of dovetails 84 of minus 2 millimeter femoral spacer 56 to allow for positioning of minus 2 millimeter femoral spacer 56 atop femoral paddle 42. Furthermore, referring to Figures 29 and 30, minus 2 millimeter femoral spacer 56 includes a pair

of expansion slots 58 facilitating outward expansion of dovetails 84 when securing minus 2 millimeter femoral spacer 56 to femoral paddle 42 of adjustable alignment block 38. When minus 2 millimeter femoral spacer 56 is secured to femoral paddle 42, adjustable alignment block protrusion 66 thereof fits within spacer slot 62 of femoral paddle 42 to prevent sliding of minus 2 millimeter femoral spacer 56 with respect to femoral paddle 42. To remove minus 2 millimeter femoral spacer 56 from femoral paddle 42, a pry bar is inserted therebetween to urge adjustable alignment block protrusion 66 out of spacer slot 62 of femoral paddle 42. Minus 2 millimeter femoral spacer 56 can then be slid from engagement with femoral paddle 42.

[0066] With adjustable alignment block 38 positioned with femoral paddle 42 (with or without minus two millimeter distal femoral spacer 56 secured thereto) positioned in the space created in the affected compartment as illustrated in Figure 13, alignment tower 70, which is illustrated in detail in Figures 15-18, is secured to adjustable alignment block 38 as illustrated in Figure 19. Referring to Figure 18, alignment tower 70 includes boss aperture 72 sized for placement of alignment tower boss 54 therein when alignment tower 70 is secured to adjustable alignment block 38. Alignment tower 70 further includes alignment protrusion 74 which abuts base 55 of adjustable alignment block 38 when alignment tower 70 is secured to adjustable alignment block 38. Alignment protrusion 74 is wedge shaped as illustrated in Figures 15 and 18. As alignment tower boss 54 of adjustable alignment block 38 traverses boss aperture 72 of alignment tower 70, alignment protrusion 74 contacts base 55 of adjustable alignment block 38 and, owing to its wedge shape, locks alignment tower 70 to adjustable alignment block 38. With alignment tower boss 54 positioned within boss aperture 72, and alignment protrusion 74 abutting base 55, alignment tower 70 is secured to adjustable alignment block 38 and will not rotate relative thereto. With adjustable alignment block 38 positioned as illustrated in Figures 13 and 19, and with alignment tower 70 secured thereto as illustrated in Figure 19, alignment rod receiving end 76 of alignment tower 70 is located between the condyles of distal femur 18'.

[0067] The alignment device is now fully assembled as illustrated in Figure 20. With adjustable alignment block 38 and alignment tower 70 positioned as illustrated in Figure 19, first end 128 of square alignment rod 80 is inserted into square alignment rod aperture 78 (Figure 15) of alignment tower 70 as illustrated in Figures 19 and 20. The opposite end of square alignment rod 80 is thereafter inserted into elongate square alignment rod aperture 92 (Figure 24) of distal telescoping rod 90 (Figures 21-14) as illustrated in Figure 20.

[0068] Prior to inserting square alignment rod 80 into elongate square alignment rod aperture 92 (Figure 24) of distal telescoping rod 90, ankle clamp 120 (Figures 25-27) is connected to distal telescoping rod 90. Referring to Figure 27, ankle clamp 120 includes dovetail chan-

nel 122 sized to accommodate dovetail 94 (Figure 22) of distal telescoping rod 90. As illustrated in Figure 22, distal telescoping rod 90 includes ankle clamp retaining knob 98 to temporarily secure ankle clamp 120 to distal telescoping rod 90. As illustrated in Figures 22-24, ankle clamp retaining knob 98 is secured to ankle clamp retaining rod 102 which is threadably engaged in ankle clamp retaining cylinder 104 and extends through dovetail 94. With dovetail 94 positioned in dovetail channel 122, ankle clamp retaining knob 98 is rotated to force an end of ankle clamp retaining rod 102 to extend from the bottom surface of dovetail 94 and create an interference fit between dovetail 94 and dovetail channel 122. Ankle clamp 120 may, in one exemplary embodiment, include a channel for accommodating the end of ankle clamp retaining rod 102 extending below dovetail 94.

[0069] With ankle clamp 120 temporarily secured to distal telescoping rod 90, spring arms 124 are opened against the biasing force of springs 126 and are positioned around the ankle proximal to the malleoli, as square alignment rod 80 is inserted into elongate square alignment rod aperture 92 of distal telescoping rod 90. Ankle clamp 120 advantageously prohibits coronal rotation of the spacing apparatus of the present invention. As illustrated in Figures 19 and 20, round alignment rod 100 is then inserted in round alignment rod aperture 82 (Figures 15 and 18) of alignment tower 70, with the remainder of round alignment rod 100 extending proximally as illustrated in Figure 20. In an alternative embodiment, round alignment rod 100 is inserted in alternative round alignment rod aperture 88. As illustrated in Figures 15 and 18, alternative round alignment rod aperture 88 is elliptical. Alternative round alignment rod aperture 88 is utilized when the alignment apparatus of the present invention is used with a patient having a large or obese thigh. Targeting guide 110 is then slid onto the proximal end of round alignment rod 100 to complete the assembly of the alignment apparatus as illustrated in Figure 20. With the alignment apparatus assembled and connected to the patient as illustrated in Figure 20, first end 128 of square alignment rod 80 and first end 130 of round alignment rod 100 are located between the condyles of distal femur 18'. Targeting guide 110 is more fully illustrated in Figures 35-37. As illustrated in Figures 36 and 37, targeting guide 110 includes round alignment rod aperture 132 into which round alignment rod 100 is positioned when the alignment apparatus is fully assembled as illustrated in Figure 20. As illustrated in Figure 35, targeting guide 110 includes anterior marking indicating proper positioning thereof. As illustrated in Figure 35, targeting guide 110 includes markings indicating left medial/right lateral, indicating that with this surface oriented anteriorly, targeting guide 110 is useful when performing a left medial unicondylar knee arthroplasty, or a right lateral unicondylar knee arthroplasty. The opposite side of targeting guide 110 includes markings indicating right medial/left lateral, indicating that with the opposite marked surface oriented anteriorly, targeting guide 110 is useful

when performing a right medial unicondylar knee arthroplasty, or a left lateral unicondylar knee arthroplasty. On the opposite side of targeting guide 110, the femoral head target area is positioned right of center.

[0070] Alternatively, the alignment assembly can be assembled before adjustable alignment block 38 is inserted into the joint. In this embodiment, spring arms 124 of ankle clamp 120 are moved against the biasing force of springs 126 into an open position to accommodate placement about the patient's ankle and are positioned about the patient's ankle as femoral paddle 42 of adjustable alignment block 38 is inserted into the compartment of the knee undergoing unicondylar knee arthroplasty. Specifically, alignment tower 70 can be positioned atop adjustable alignment block 38, with alignment tower boss 54 of adjustable alignment block 38 inserted into boss aperture 72 of alignment tower 70, and with alignment protrusion 74 abutting base 55 of adjustable alignment block 38. With alignment tower 70 secured to adjustable alignment block 38, ankle clamp 120 is slid onto dovetail 94 of distal telescoping rod 90 with ankle clamp retaining knob 98 tightened to temporarily hold ankle clamp 120 to distal telescoping rod 90. An end of square alignment rod 80 is then inserted into distal telescoping rod 90, and first end 128 of square alignment rod 80 is positioned through square alignment rod aperture 78 (Figure 15) of alignment tower 70. With leg alignment passively corrected, the joint is held open and femoral paddle 42 of adjustable alignment block 38 is inserted into the space created in the effected compartment of the knee, with the ankle clamp positioned above the ankle. At this point, spring arms 124 are moved against the biasing force of springs 126 into an open position and placed about the ankle proximal to the malleoli to complete securement of the alignment apparatus to the patient. Alternatively, as indicated above, the ankle clamp may be secured about the ankle concurrent with introduction of femoral paddle 42 of adjustable alignment block 38 into the effected compartment of the knee.

Joint Alignment

[0071] With the alignment apparatus positioned as illustrated in Figure 20, ankle clamp retaining knob 98 is loosened to allow for mediolateral adjustment of distal telescoping rod 90. With ankle clamp retaining knob 90 loosened to allow for relative movement of distal telescoping rod 90 with respect to ankle clamp 120, distal tip 106 of distal telescoping rod 90 is moved until it is positioned about 5-10 millimeters medial to the midpoint between the palpable medial and lateral malleoli. For the medial compartment arthroplasty disclosed herein, distal tip 106 should point to the second metatarsal. When distal tip 106 of distal telescoping rod 90 is properly positioned as indicated above, ankle clamp retaining knob 98 is tightened to secure distal telescoping rod in this mediolateral position. Proximally, the longitudinal axis of square alignment rod 80 (and, consequently, distal telescoping rod

90) should lie just medial to the midpoint of the tibial tubercle and be centered over the intercondylar eminence. Distal telescoping rod 90 and square alignment rod 80 are positioned parallel to the anterior tibial crest by loosening elevation adjustment knob 108 and adjusting the height of square alignment rod tube 112 and, consequently, square alignment rod 80 until they are parallel to the anterior tibial crest and thereafter tightening elevation adjustment knob 108 to hold the distal alignment apparatus in the proper position.

[0072] The leg is now positioned in the desired alignment by moving the leg until targeting guide 110 points toward the center of the femoral head. Over correction should be avoided. It is preferable to align the limb in a slight varus for medial compartment arthroplasty or in slight valgus for a lateral compartment arthroplasty. With this in mind, the femoral head target area marked on targeting guide 110 is offset to the left of the longitudinal axis of round alignment rod aperture 132 as illustrated in Figure 35. This offset allows for the desired slight under-correction in limb alignment. With the limb properly aligned, actuation knob 52 is turned to actuate adjustable alignment block 38 from the closed position illustrated in Figures 9 and 7 into an open position (e.g., the position illustrated in Figures 6 and 10), with opening discontinuing when tibial paddle 44 engages the proximal tibia and the joint space is filled. Adjustable alignment block 38 is utilized to hold the joint in alignment.

[0073] With the joint held in proper alignment, headless screws 160 (see, e.g., Figure 39) are inserted through tibial affixment apertures 46 of adjustable alignment block 38 and driven into tibia 12', leaving the screws proud of adjustable alignment block 38. If preferred, headless holding pins can be used in place of the headless screws, but in this embodiment holes must be pre-drilled to accept the pins without drilling down to the entire length of the pin that will be inserted, as this may compromise pin fixation. A headed screw is then inserted through femoral affixment aperture 48 in adjustable alignment block 38 and driven into distal femur 18'. The headed screw may be hand tightened into femur 10' to avoid over torquing and the consequent stripping of the bone stock. At this point alignment is verified, and, if unchanged, alignment tower 70, round alignment rod 100, square alignment rod 80, distal telescoping rod 90, and ankle clamp 120 are removed.

[0074] With adjustable alignment block 38 secured to femur 10' and tibia 12' (see, e.g., Figure 20), an oscillating or reciprocating blade is inserted through femoral cut slot 40 of adjustable alignment block 38 and utilized to resect the distal femoral condyle. In one exemplary embodiment, the distal femoral cut is started with adjustable alignment block 38 secured to both the tibia and the femur, and is completed by removing the headed screw positioned through femoral affixment aperture 48, and placing the knee in flexion. If the distal femoral cut is finished with adjustable alignment block 38 secured to femur 10' and tibia 12', then the headed femoral screw

is removed from femoral affixment aperture 48 after the distal femoral resection is complete.

[0075] After removing the femoral screw, adjustable alignment block 38 is actuated toward the closed position illustrated in Figures 7 and 9 by rotating actuation knob 52 in a counterclockwise direction. Adjustable alignment block 38 is then removed with, e.g., pin pliers, leaving the headless screws 160 in tibia 12'. The headless screws provide the link between the distal femoral cut and the tibial plateau cut.

[0076] Tibial cut block 140 illustrated in Figure 32-34 is next utilized to guide tibial resection. As illustrated in Figure 32, tibial cut block 140 includes hole pairs 142/142', 144/144', 146/146', and 148/148'. Each hole pair is spaced to accommodate insertion of headless screws 160 positioned through tibial affixment apertures 46 of adjustable alignment block 38 and left in tibia 12' as described above. In this way, hole pairs 142/142', 144/144', 146/146', and 148/148' are used in conjunction with resection slot 150 to link the tibial cut to the distal femoral cut. As illustrated in Figure 34, the longitudinal axes of holes 142 and 146 form a three degree angle with resection slot 150, allowing for a three degree tibial slope. It is contemplated that tibial cut blocks in accordance with the present invention can provide varying tibial slope, including nine, seven, five, or zero degrees of tibial slope.

[0077] As illustrated in Figure 32, hole pair 142/142' is marked 8 on tibial cut block 140. Similarly, the remaining hole pairs are marked 10, 12, and 14. These hole pair designations correspond to the size of the tibial prosthetic implant, i.e., the tibial component and the bearing surface. While the exemplary embodiment includes hole pairs marked 8, 10, 12, and 14, it is contemplated that a tibial cut block in accordance with the present invention could include additional cut depths corresponding to tibial prostheses of alternative thicknesses. Initially, the headless screws protruding from tibia 12' are inserted through hole pair 142/142' corresponding to an 8 millimeter tibial articular surface, i.e., the minimum tibial resection necessary for an 8 millimeter tibial articular surface. Positioning the headless tibial screws through a hole pair of the tibial cut block aligns resection slot 150 substantially perpendicular to the mechanical axis of the knee and substantially parallel to the distal femoral cut. If a tibial cut block providing a tibial slope is utilized, then the size designations reference the middle of the tibial resection, with the middle being measured anterior to posterior, i.e., along a line contained in a sagittal plane.

[0078] After tibial cut block 140 is positioned over the headless tibial screws, the knee is flexed. If skin tension affects the alignment of tibial cut block 140, then the incision may be lengthened. In one exemplary embodiment, a resection guide can be inserted through resection slot 150 to help verify that the chosen tibial resection will be adequate. If the resection guide indicates that an insufficient amount of bone will be resected, or if a thicker articular surface is desired, tibial cut block 140 can be

removed from engagement with the headless tibial screws and replaced using the next hole pair, i.e., hole pair 144/144'. A resection guide can again be utilized to help verify that the tibial resection will be adequate and tibial cut block 140 can be repositioned in the next hole pair as necessary.

[0079] Once tibial cut block 140 is properly positioned, with headless tibial screws 160 extending through a hole pair thereof, the tibia is resected to receive a tibial implant.

When resecting the femur, a retractor can be inserted medially to protect the medial collateral ligament. As illustrated in Figure 38, the sagittal cut in tibia 12' can be made free hand. With the knee flexed, blade 152 of reciprocating saw 154 is positioned adjacent tibial eminence 156 in the affected compartment. As illustrated in Figure 38, blade 152 of reciprocating saw 154 is positioned substantially parallel to the tibial eminence in the anterior/posterior plane. With blade 152 in position as illustrated in Figure 38, a cut is made in the tibia along the medial edge of the tibial eminence until blade 152 contacts proximal surface 158 of tibial cut block 140. Proximal surface 158 is utilized as a guide to determine the anterior/posterior slope of the sagittal cut. Cutting to proximal surface 158 of tibial cut block 140 leaves approximately 3-4 millimeters of unresected bone of the sagittal cut. Tibial cut block 140 can be manually held in place against the bone during tibial resection, or, alternatively, one or a pair of hemostats can be clamped to headless tibial screws 160 in position abutting tibial cut block 140 to hold tibial cut block 140 flush against tibia 12'.

[0080] Optionally, tibial cut block 140 may be repositioned on headless tibial screws 160 to a hole pair that is 4 millimeters above the hole pair that will be used for the horizontal cut when making the sagittal cut. For example, if the hole pair corresponding to an 8 millimeter cut, i.e., hole pair 142/142' is determined to be the appropriate resection level, then tibial cut block 140 can be repositioned with headless tibial screws 160 positioned through hole pair 146/146' corresponding to a 12 millimeter resection. Repositioning the cut block to a pair of holes 4 millimeters above the holes desired for the horizontal cut will place proximal surface 158 of tibial cut block 140 even with the desired proximal resection level and provide a mechanical stop for the sagittal cut. Note that in the exemplary embodiment disclosed, this option is only available when an 8 millimeter or 10 millimeter implant cut depth is the desired horizontal resection level.

[0081] Figure 39 illustrates hemostat 162 clamped to lateral tibial headless pin 160 to secure tibial cut block 140 flush against tibia 12'. As illustrated in Figure 39, oscillating saw 32 is utilized to make the proximal tibial cut. As illustrated in Figure 39, oscillating saw blade 36 is inserted through resection slot 150 of tibial cut block 140 to make the proximal tibial cut. When making the proximal tibial cut in this fashion, care should be taken to avoid undercutting tibial eminence 156. After the horizontal proximal tibial resection is complete, tibial cut block 140 and headless tibial screws 160 are removed.

And, if the sagittal cut is unfinished, this cut is completed and the resected tibial bone fragment is removed.

[0082] The remaining meniscus can now be removed and a femoral cut guide referencing the distal femoral cut made through femoral cut slot 40 of adjustable alignment box 38 can be utilized to complete shaping of femur 10'. Provisional femoral and tibial implants are now used to perform a trial reduction and final implants are subsequently seated.

[0083] In an alternative embodiment of the present invention, the tibial cuts can be first made by aligning the joint with the alignment apparatus described above and positioning headless tibial screws 160 through tibial affixment apertures 46 of adjustable alignment block 38, but not utilizing a headed screw to secure adjustable alignment block 38 to femur 10'. With headless tibial screws 160 secured in tibia 12', the alignment apparatus is removed, including adjustable alignment block 38 and tibial cut block 140 is utilized to resect the tibia as described above. When tibial resection is complete, adjustable alignment block 38 is repositioned over headless tibial screws 60 (Figures 38 and 39) with the alignment apparatus reassembled as illustrated in Figure 20 to facilitate limb alignment. After appropriate limb alignment is achieved the headed femoral screw is positioned through femoral affixment aperture 48 of adjustable alignment block 38 as described above and the distal femur is resected through femoral cut slot 40 as described above.

[0084] While this invention has been described as having exemplary designs, the present invention may be further modified within the scope of the claims. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles defined in the claims. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains.

Claims

1. An apparatus for preparing a knee for receiving a knee prosthesis, comprising:

a femoral cut block (38) having a body (39) including a femoral cut slot (40); and

a tibial cut block (140) having a body (140) including a tibial cut slot (150); **characterised in that** the apparatus further comprises:

a tibial affixment aperture (46) formed in said femoral cut block (38);
headless fixing means (160) for securing said femoral cut block (38) to a tibia, said headless fixing means (160) traversing said tibial affixment aperture (46) in said femoral cut block (38) to secure said femoral cut

block (38) to said tibia; and

a tibial securement aperture (142, 144, 146, 148) formed in said tibial cut block (140), said tibial securement aperture sized to accommodate passage of said headless fixing means (160) therethrough, the headless fixing means (160) linking said femoral cut slot (40) and said tibial cut slot (150) and allowing a proximal tibial cut to be made through said tibial cut slot (150) with the knee in flexion.

2. The apparatus of claim 1, **characterised in that** said headless fixing means (160) comprises a pair of headless screws (160) and **in that** said tibial cut block body (140) includes a pair of tibial securement apertures (142, 142', 144, 144', 146, 146', 148, 148').
3. The apparatus of claim 1, **characterised in that** said headless fixing means (160) comprises a pair of headless pins and **in that** said tibial cut block body (140) includes a pair of tibial securement apertures (142, 142', 144, 144', 146, 146', 148, 148').
4. An apparatus as claimed in claim 1 **characterised in that** the femoral cut block (38) comprises a femoral securement aperture (48) and said tibial affixment aperture (46) of said femoral cut block (38) is spaced a predetermined distance from said femoral cut slot (40), and said tibial securement aperture of said tibial cut block (140) is spaced a predetermined distance from said tibial cut slot (150).
5. The apparatus of claim 1, **characterised in that** said tibial cut block (140) includes a plurality of tibial securement apertures (142, 142', 144, 144', 146, 146', 148, 148') spaced differing distances from said tibial cut slot (150).
6. The apparatus of claim 1, **characterised in that** said femoral cut block (38) includes spacing means (42, 44) for maintaining a spacing in a compartment of a knee to correct limb alignment.
7. The apparatus of claim 6, **characterised in that** said spacing means comprises:
a femoral paddle (42) extending from said body of said femoral cut block (38); and
a tibial paddle (44) moveably connected to said body of said femoral cut block (38), whereby said tibial paddle (44) is moved to abut a proximal tibia, with said femoral paddle (42) abutting a distal femur when said knee is positioned to correct limb alignment.
8. The apparatus of claim 7, **characterised in that** it further comprises a femoral spacer (56) secured to

said femoral paddle (42) of said spacing means, said femoral spacer (56) having a thickness extending toward the distal femur.

9. An apparatus as claimed in claim 8, **characterised in that**

the femoral spacer (56) is releasably secured to said femoral paddle (42).

10. The apparatus of claim 8, **characterised in that** said femoral spacer (56) includes a pair of opposing dovetails (84) extending from a lower surface thereof to releasably secure said femoral spacer (56) to said femoral paddle (42), said femoral spacer (56) further includes an expansion channel (58) extending the thickness of the femoral spacer (56) and positioned intermediate said dovetails (84).

Patentansprüche

1. Vorrichtung zum Präparieren eines Knies zum Aufnehmen einer Knieprothese mit:

einem Femoralschneidblock (38) mit einem Körper (39) mit einem Femoralschneidschlitz (40); und

einem Tibialschneidblock (140) mit einem Körper (140) mit einem Tibialschneidschlitz (150); **dadurch gekennzeichnet, daß** die Vorrichtung ferner aufweist:

eine Tibialfixierungsöffnung (46), die in dem Femoralschneidblock (38) ausgebildet ist; eine kopflose Fixiereinrichtung (160) zum Befestigen des Femoralschneidblocks (38) an einer Tibia, wobei die kopflose Fixiereinrichtung (160) die Tibialfixierungsöffnung (46) in dem Femoralschneidblock (38) durchdringt, um den Femoralschneidblock (38) an der Tibia zu befestigen; und eine Tibialbefestigungsöffnung (142, 144, 146, 148), die im Tibialschneidblock (140) ausgebildet ist, wobei die Tibialbefestigungsöffnung so bemessen ist, daß sie dem Durchtritt der kopflosen Fixiereinrichtung (160) durch sie hindurch angepasst ist, wobei die kopflose Fixiereinrichtung (160) den Femoralschneidschlitz (40) und den Tibialschneidschlitz (150) verbindet und erlaubt, daß ein proximaler Tibialschnitt durch den Tibialschneidschlitz (150) durchgeführt wird, während das Knie gebeugt ist.

2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die kopflose Fixiereinrichtung (160) ein Paar kopflose Schrauben (160) aufweist und daß

der Tibialschneidblockkörper (140) ein Paar Tibialbefestigungsöffnungen (142, 142', 144, 144', 146, 146', 148, 148') aufweist.

3. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** die kopflose Fixiereinrichtung (160) ein Paar kopflose Stifte aufweist und daß der Tibialschneidblockkörper (140) ein Paar Tibialbefestigungsöffnungen (142, 142', 144, 144', 146, 146', 148, 148') aufweist.

4. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** der Femoralschneidblock (38) eine Femoralbefestigungsöffnung (48) aufweist und die Tibialfixierungsöffnung (46) des Femoralschneidblocks (38) um einen vorbestimmten Abstand von dem Femoralschneidschlitz (40) beabstandet ist und die Tibialbefestigungsöffnung des Tibialschneidblocks (140) um einen vorbestimmten Abstand von dem Tibialschneidschlitz (150) beabstandet ist.

5. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** der Tibialschneidblock (140) mehrere Tibialbefestigungsöffnungen (142, 142', 144, 144', 146, 146', 148, 148') aufweist, die um verschiedene Abstände von dem Tibialschneidschlitz (150) beabstandet sind.

6. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, daß** der Femoralschneidblock (38) eine Abstandseinrichtung (42, 44) zum Halten eines Abstands in einem Kompartiment eines Knies aufweist, um eine Ausrichtung des Beines zu korrigieren.

7. Vorrichtung nach Anspruch 6, **dadurch gekennzeichnet, daß** die Abstandseinrichtung aufweist:

einen Femoralschenkel (42), der sich von dem Körper des Femoralschneidblocks (38) erstreckt; und

einen Tibialschenkel (44), der mit dem Körper des Femoralschneidblocks (38) beweglich verbunden ist, wodurch der Tibialschenkel (44) bewegt wird, um an einer proximalen Tibia anzuliegen, wobei der Femoralschenkel (42) an einem distalen Femur anliegt, wenn das Knie positioniert ist, um eine Ausrichtung des Beines zu korrigieren.

8. Vorrichtung nach Anspruch 7, **dadurch gekennzeichnet, daß** sie ferner einen Femoralabstandshalter (56) aufweist, der an dem Femoralschenkel (42) der Abstandseinrichtung befestigt ist, wobei der Femoralabstandshalter (56) eine Dicke hat, die sich in Richtung des distalen Femurs erstreckt.

9. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, daß** der Femoralabstandshalter (56) an

dem Femoralschenkel (42) lösbar befestigt ist.

10. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, daß** der Femoralabstandshalter (56) ein Paar gegenüberliegende Zinken (84) aufweist, die sich von seiner unteren Fläche erstrecken, um den Femoralabstandshalter (56) an dem Femoralschenkel (42) lösbar zu befestigen, wobei der Femoralabstandshalter (56) ferner einen Dehnungskanal (58) aufweist, der sich über die Dicke des Femoralabstandshalters (56) erstreckt und der zwischen den Zinken (84) positioniert ist.

Revendications

1. Dispositif de préparation d'un genou destiné à recevoir une prothèse de genou, comprenant :

un bloc de coupe fémoral (38) ayant un corps (39) incluant une fente de coupe fémorale (40) ;
et
un bloc de coupe tibial (140) ayant un corps (140) incluant une fente de coupe tibiale (150) ;
caractérisé en ce que le dispositif comprend en outre :

un trou d'ancrage tibial (46) formé dans ledit bloc de coupe fémoral (38) ;
un moyen de fixation sans tête (160) pour fixer ledit bloc de coupe fémoral (38) à un tibia, ledit moyen de fixation sans tête (160) traversant ledit trou d'ancrage tibial (46) dans ledit bloc de coupe fémoral (38) pour fixer ledit bloc de coupe fémoral (38) audit tibia ; et
un trou de fixation tibiale (142, 144, 146, 148) formé dans ledit bloc de coupe tibial (140), ledit trou de fixation tibiale étant taillé pour y ménager un passage dudit moyen de fixation sans tête (160), le moyen de fixation sans tête (160) liant ladite fente de coupe fémorale (40) et ladite fente de coupe tibiale (150) et permettant de réaliser une coupe tibiale proximale au travers de ladite fente de coupe tibiale (150) avec le genou en flexion.

2. Dispositif selon la revendication 1, **caractérisé en ce que** ledit moyen de fixation sans tête (160) comprend une paire de vis sans tête (160) et **en ce que** ledit corps de bloc de coupe tibial (140) inclut une paire de trous de fixation tibiale (142, 142', 144, 144', 146, 146', 148, 148').
3. Dispositif selon la revendication 1, **caractérisé en ce que** ledit moyen de fixation sans tête (160) comprend une paire d'épingles sans tête et **en ce que**

ledit corps de bloc de coupe tibial (140) inclut une paire de trous de fixation tibiale (142, 142', 144, 144', 146, 146', 148, 148').

4. Dispositif selon la revendication 1, **caractérisé en ce que** ledit bloc de coupe fémoral (38) comprend un trou de fixation fémorale (48) et ledit trou d'ancrage tibial (46) dudit bloc de coupe fémoral (38) est d'espacé d'une distance prédéterminée de ladite fente de coupe fémorale (40) et ledit trou de fixation tibiale dudit bloc de coupe tibial (140) est espacé d'une distance prédéterminée de ladite fente de coupe tibiale (150).
5. Dispositif selon la revendication 1, **caractérisé en ce que** ledit bloc de coupe tibial (140) inclut une pluralité de trous de fixation tibiale (142, 142', 144, 144', 146, 146', 148, 148') espacés par des distances différentes de ladite fente de coupe tibiale (150).
6. Dispositif selon la revendication 1, **caractérisé en ce que** ledit bloc de coupe fémoral (38) inclut un moyen d'espacement (42, 44) afin de maintenir un espacement dans un compartiment d'un genou pour corriger l'alignement du membre.
7. Dispositif selon la revendication 6, **caractérisé en ce que** ledit moyen d'espacement comprend :
- une palette fémorale (42) s'étendant à partir dudit corps dudit bloc de coupe fémoral (38); et
une palette tibiale (44) reliée de façon amovible audit corps dudit bloc de coupe fémoral (38), d'où il résulte que ladite palette tibiale (44) est déplacée pour buter sur le tibia proximal, avec la palette fémorale (42) butant sur le fémur distal lorsque ledit genou est positionné pour corriger l'alignement du membre.
8. Dispositif selon la revendication 7, **caractérisé en ce qu'il** comprend en outre un espaceur fémoral (56) fixé à ladite palette fémorale (42) dudit moyen d'espacement, ledit espaceur fémoral (56) ayant une épaisseur s'étendant vers le fémur distal.
9. Dispositif selon la revendication 8, **caractérisé en ce que** l'espaceur fémoral (56) est fixé de façon amovible à ladite palette fémorale (42).
10. Dispositif selon la revendication 8, **caractérisé en ce que** ledit espaceur fémoral (56) inclut une paire de queues d'aronde opposées (84) s'étendant à partir d'une surface inférieure de celui-ci afin de fixer de façon amovible ledit espaceur fémoral (56) à ladite palette fémorale (42), ledit espaceur fémoral (56) inclut en outre un canal d'extension (58) s'étendant dans l'épaisseur de l'espaceur fémoral (56) et posi-

tionné entre lesdites queues d'aronde (84).

5

10

15

20

25

30

35

40

45

50

55

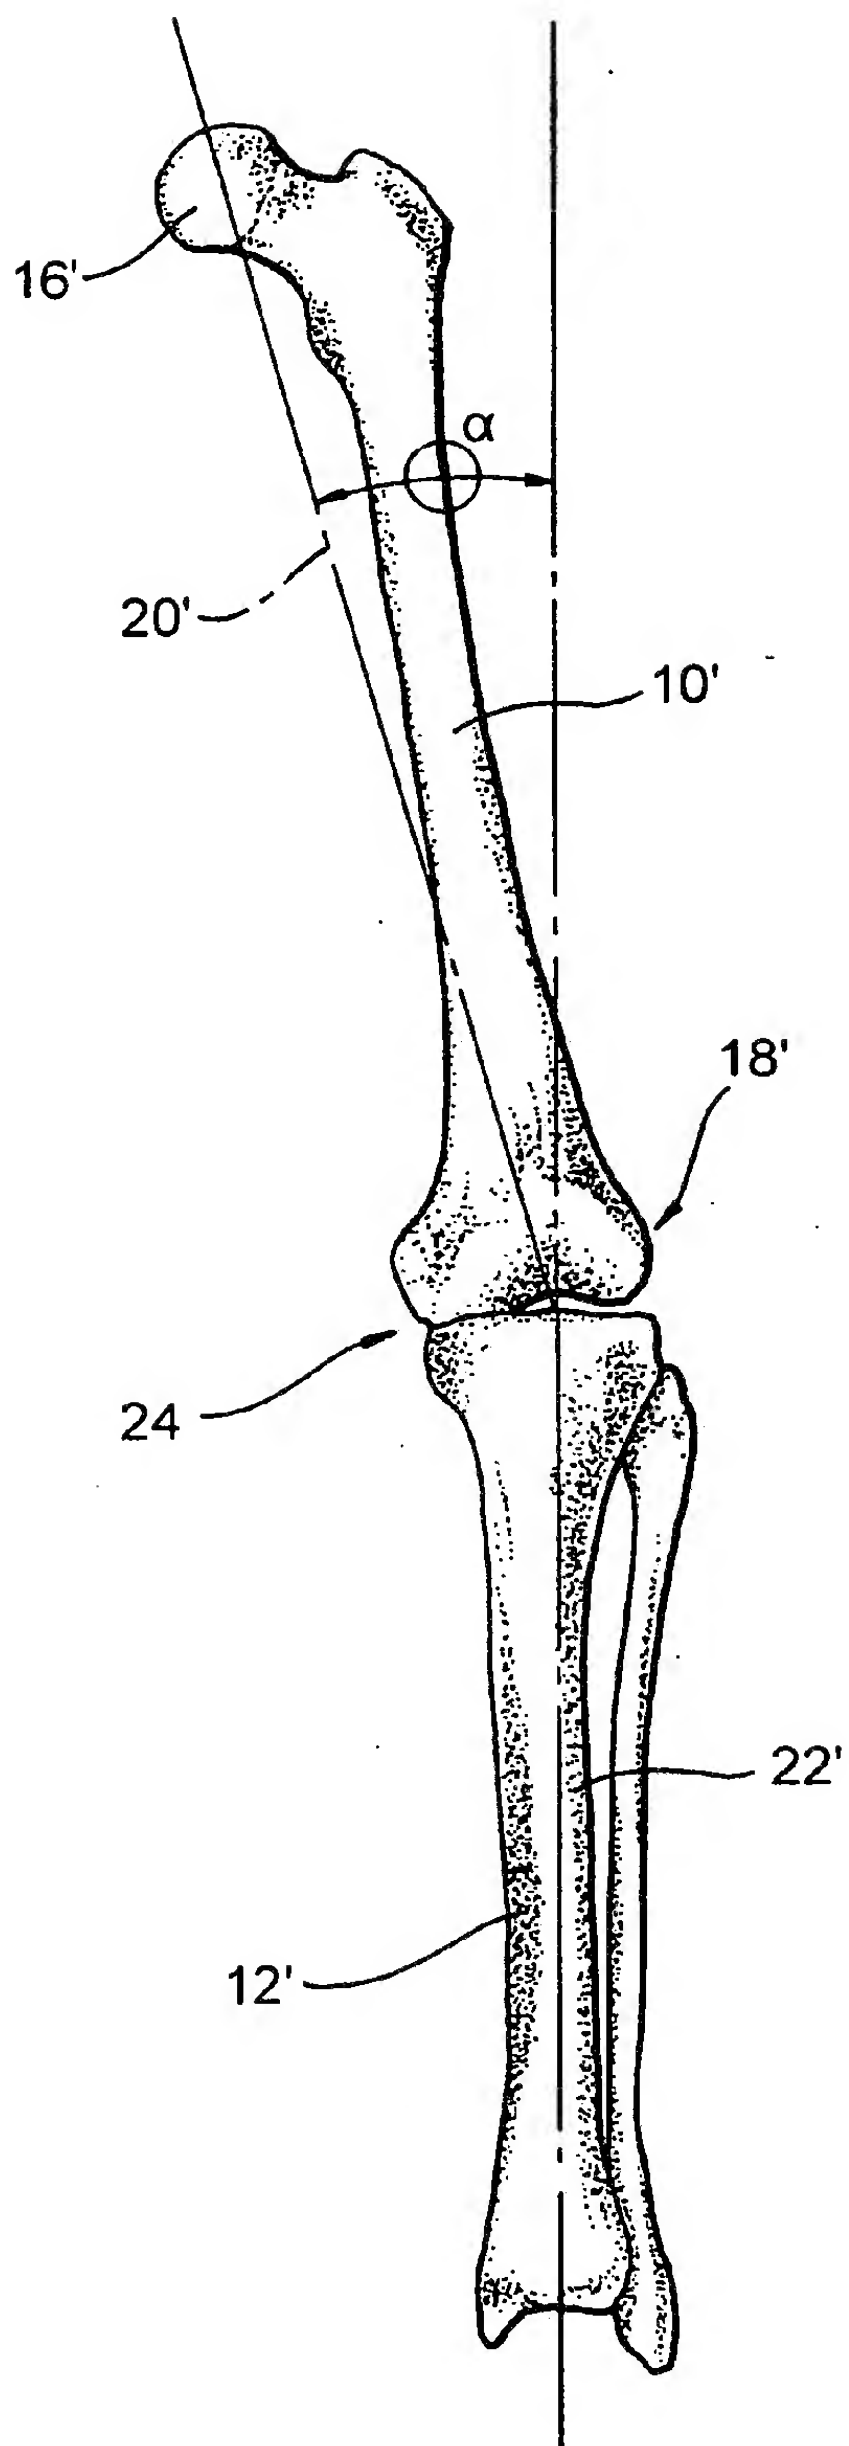


FIG. 2

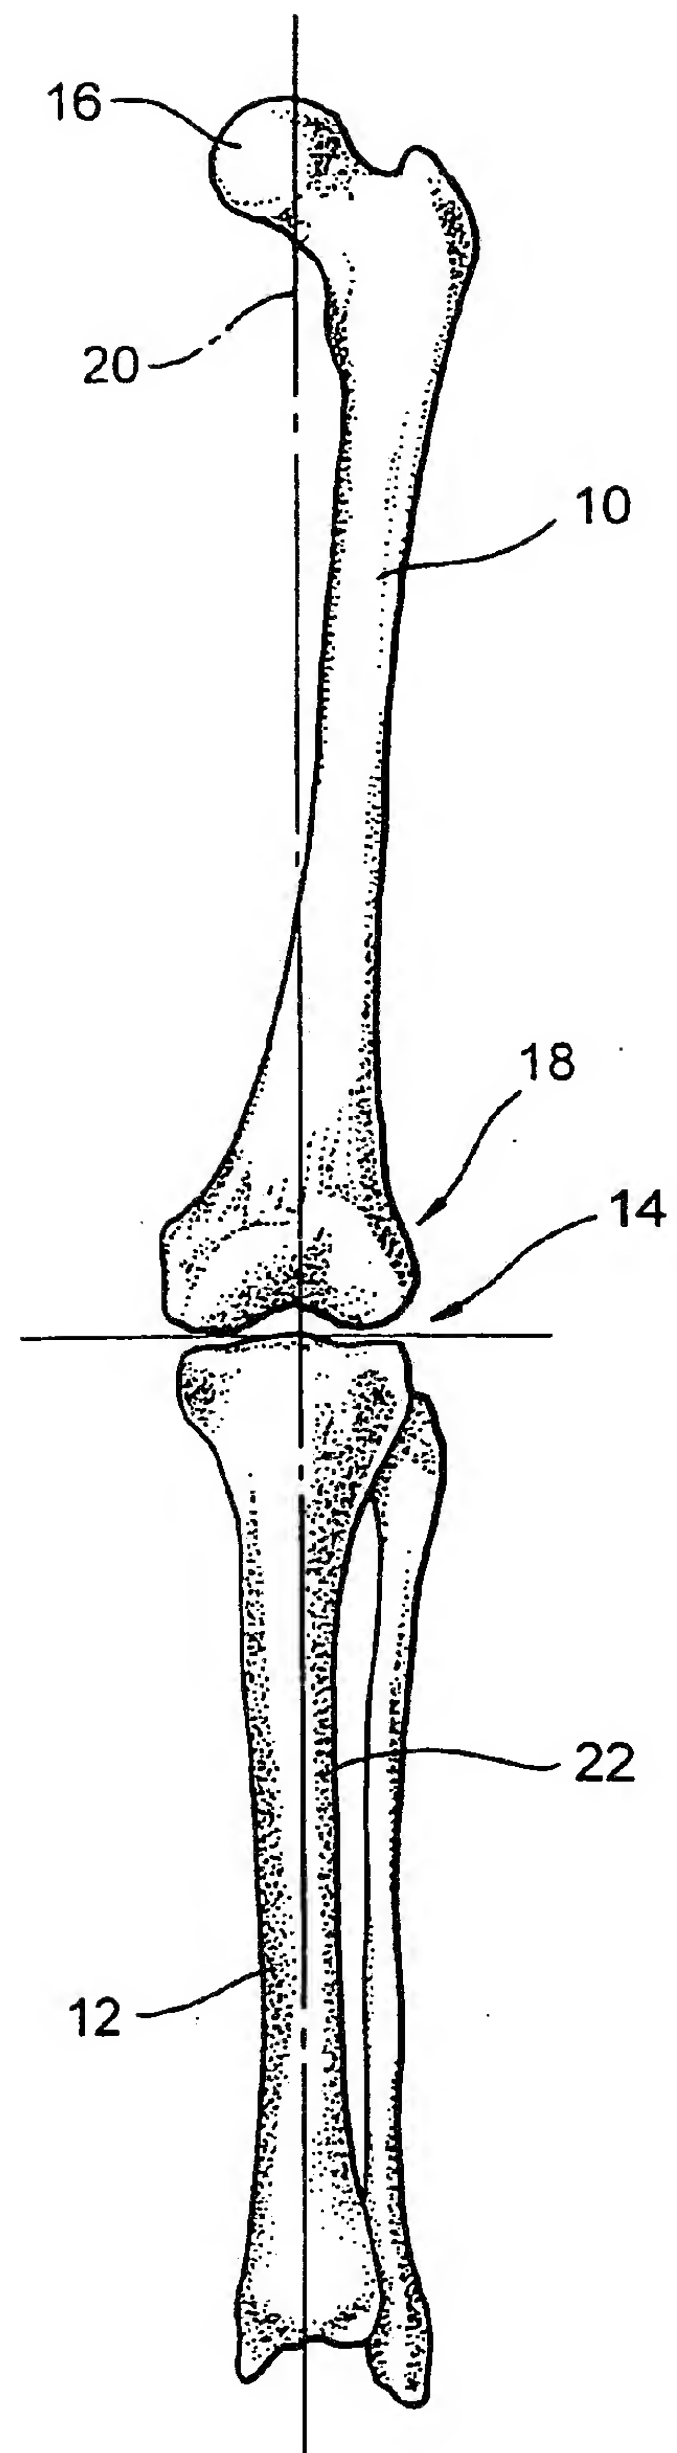


FIG. 1

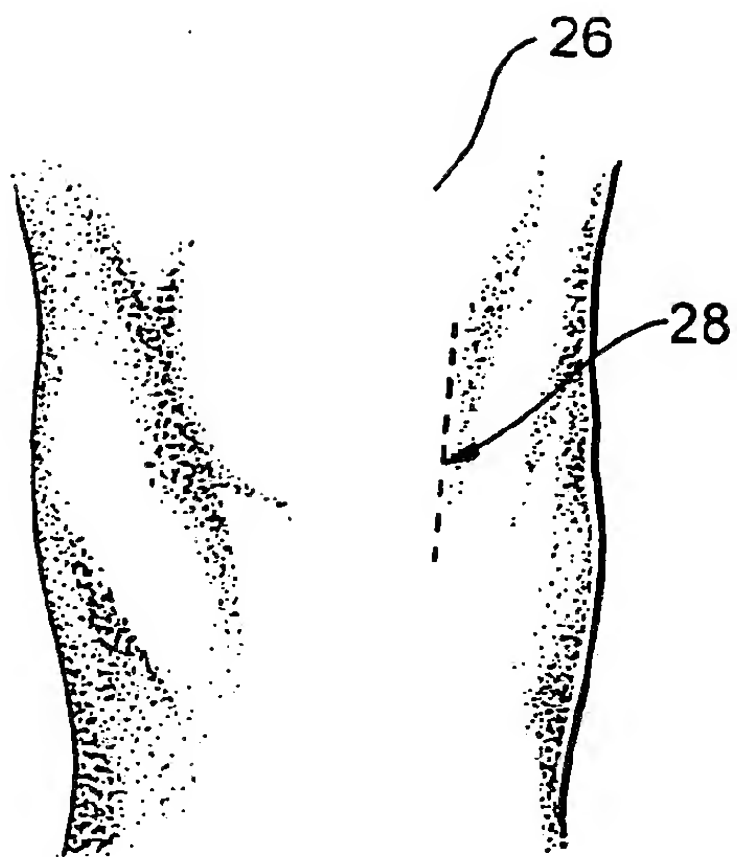


FIG. 3

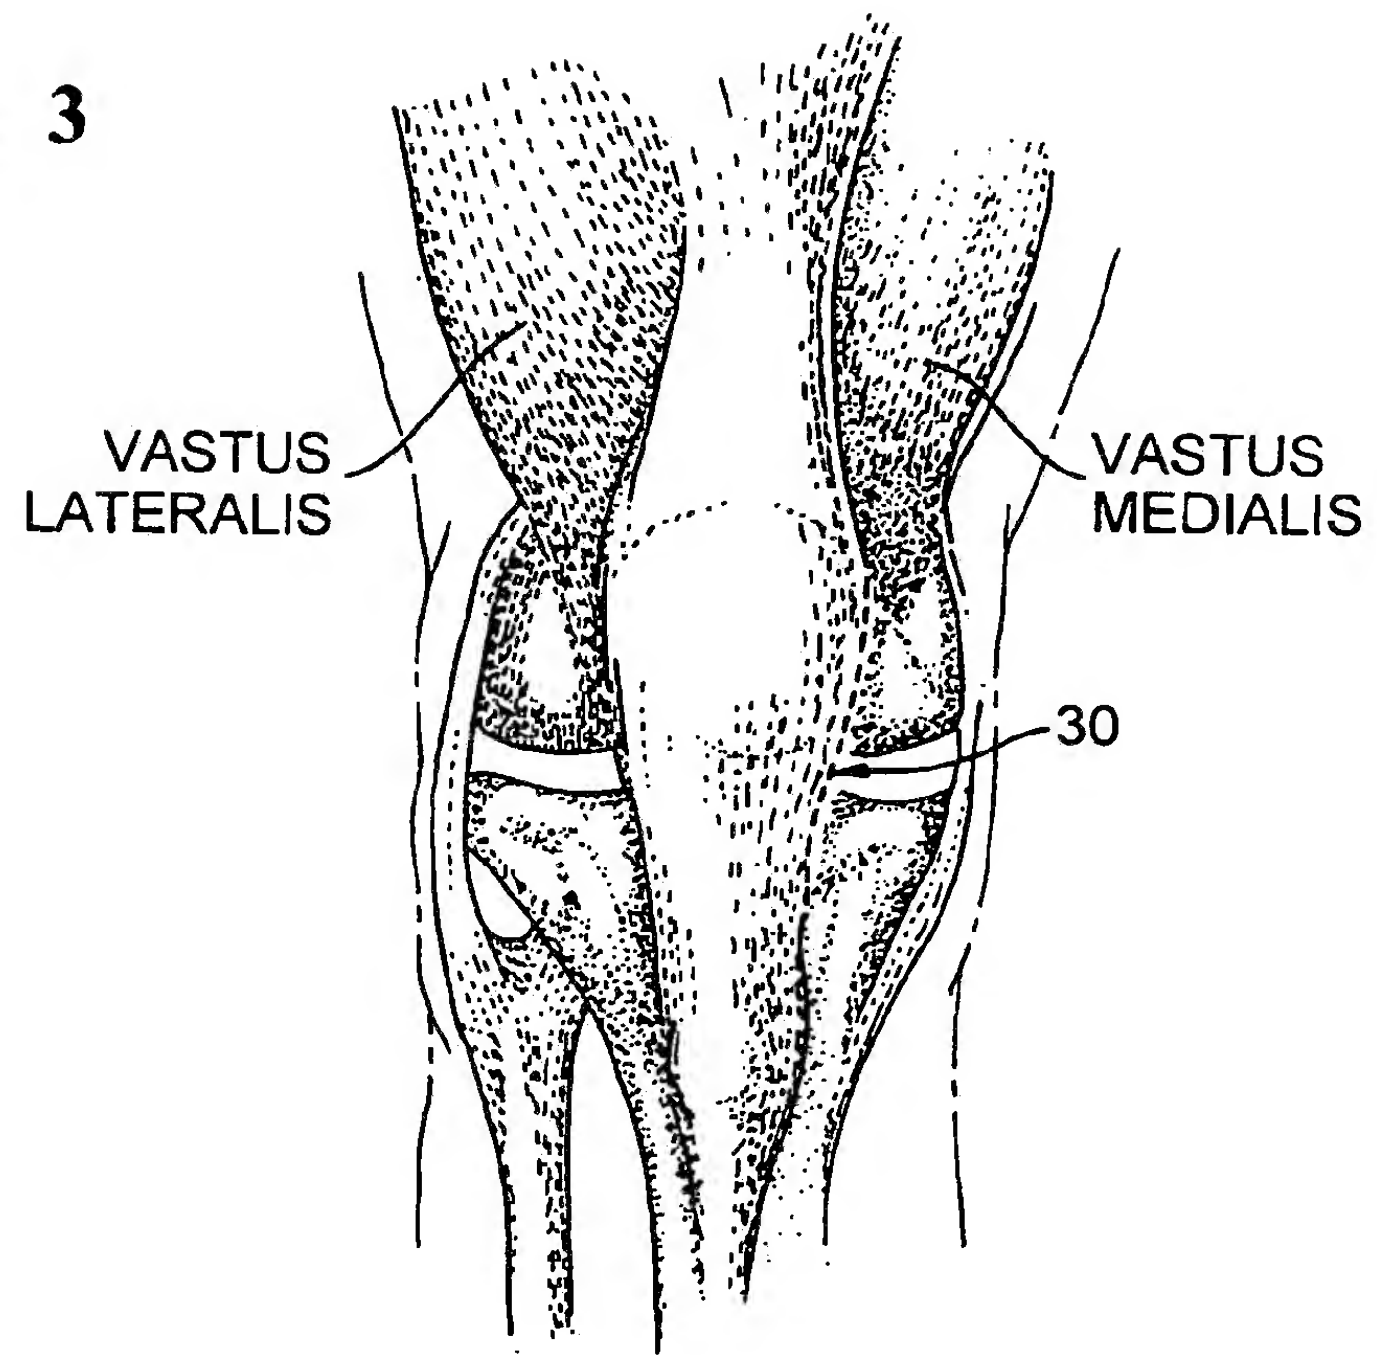
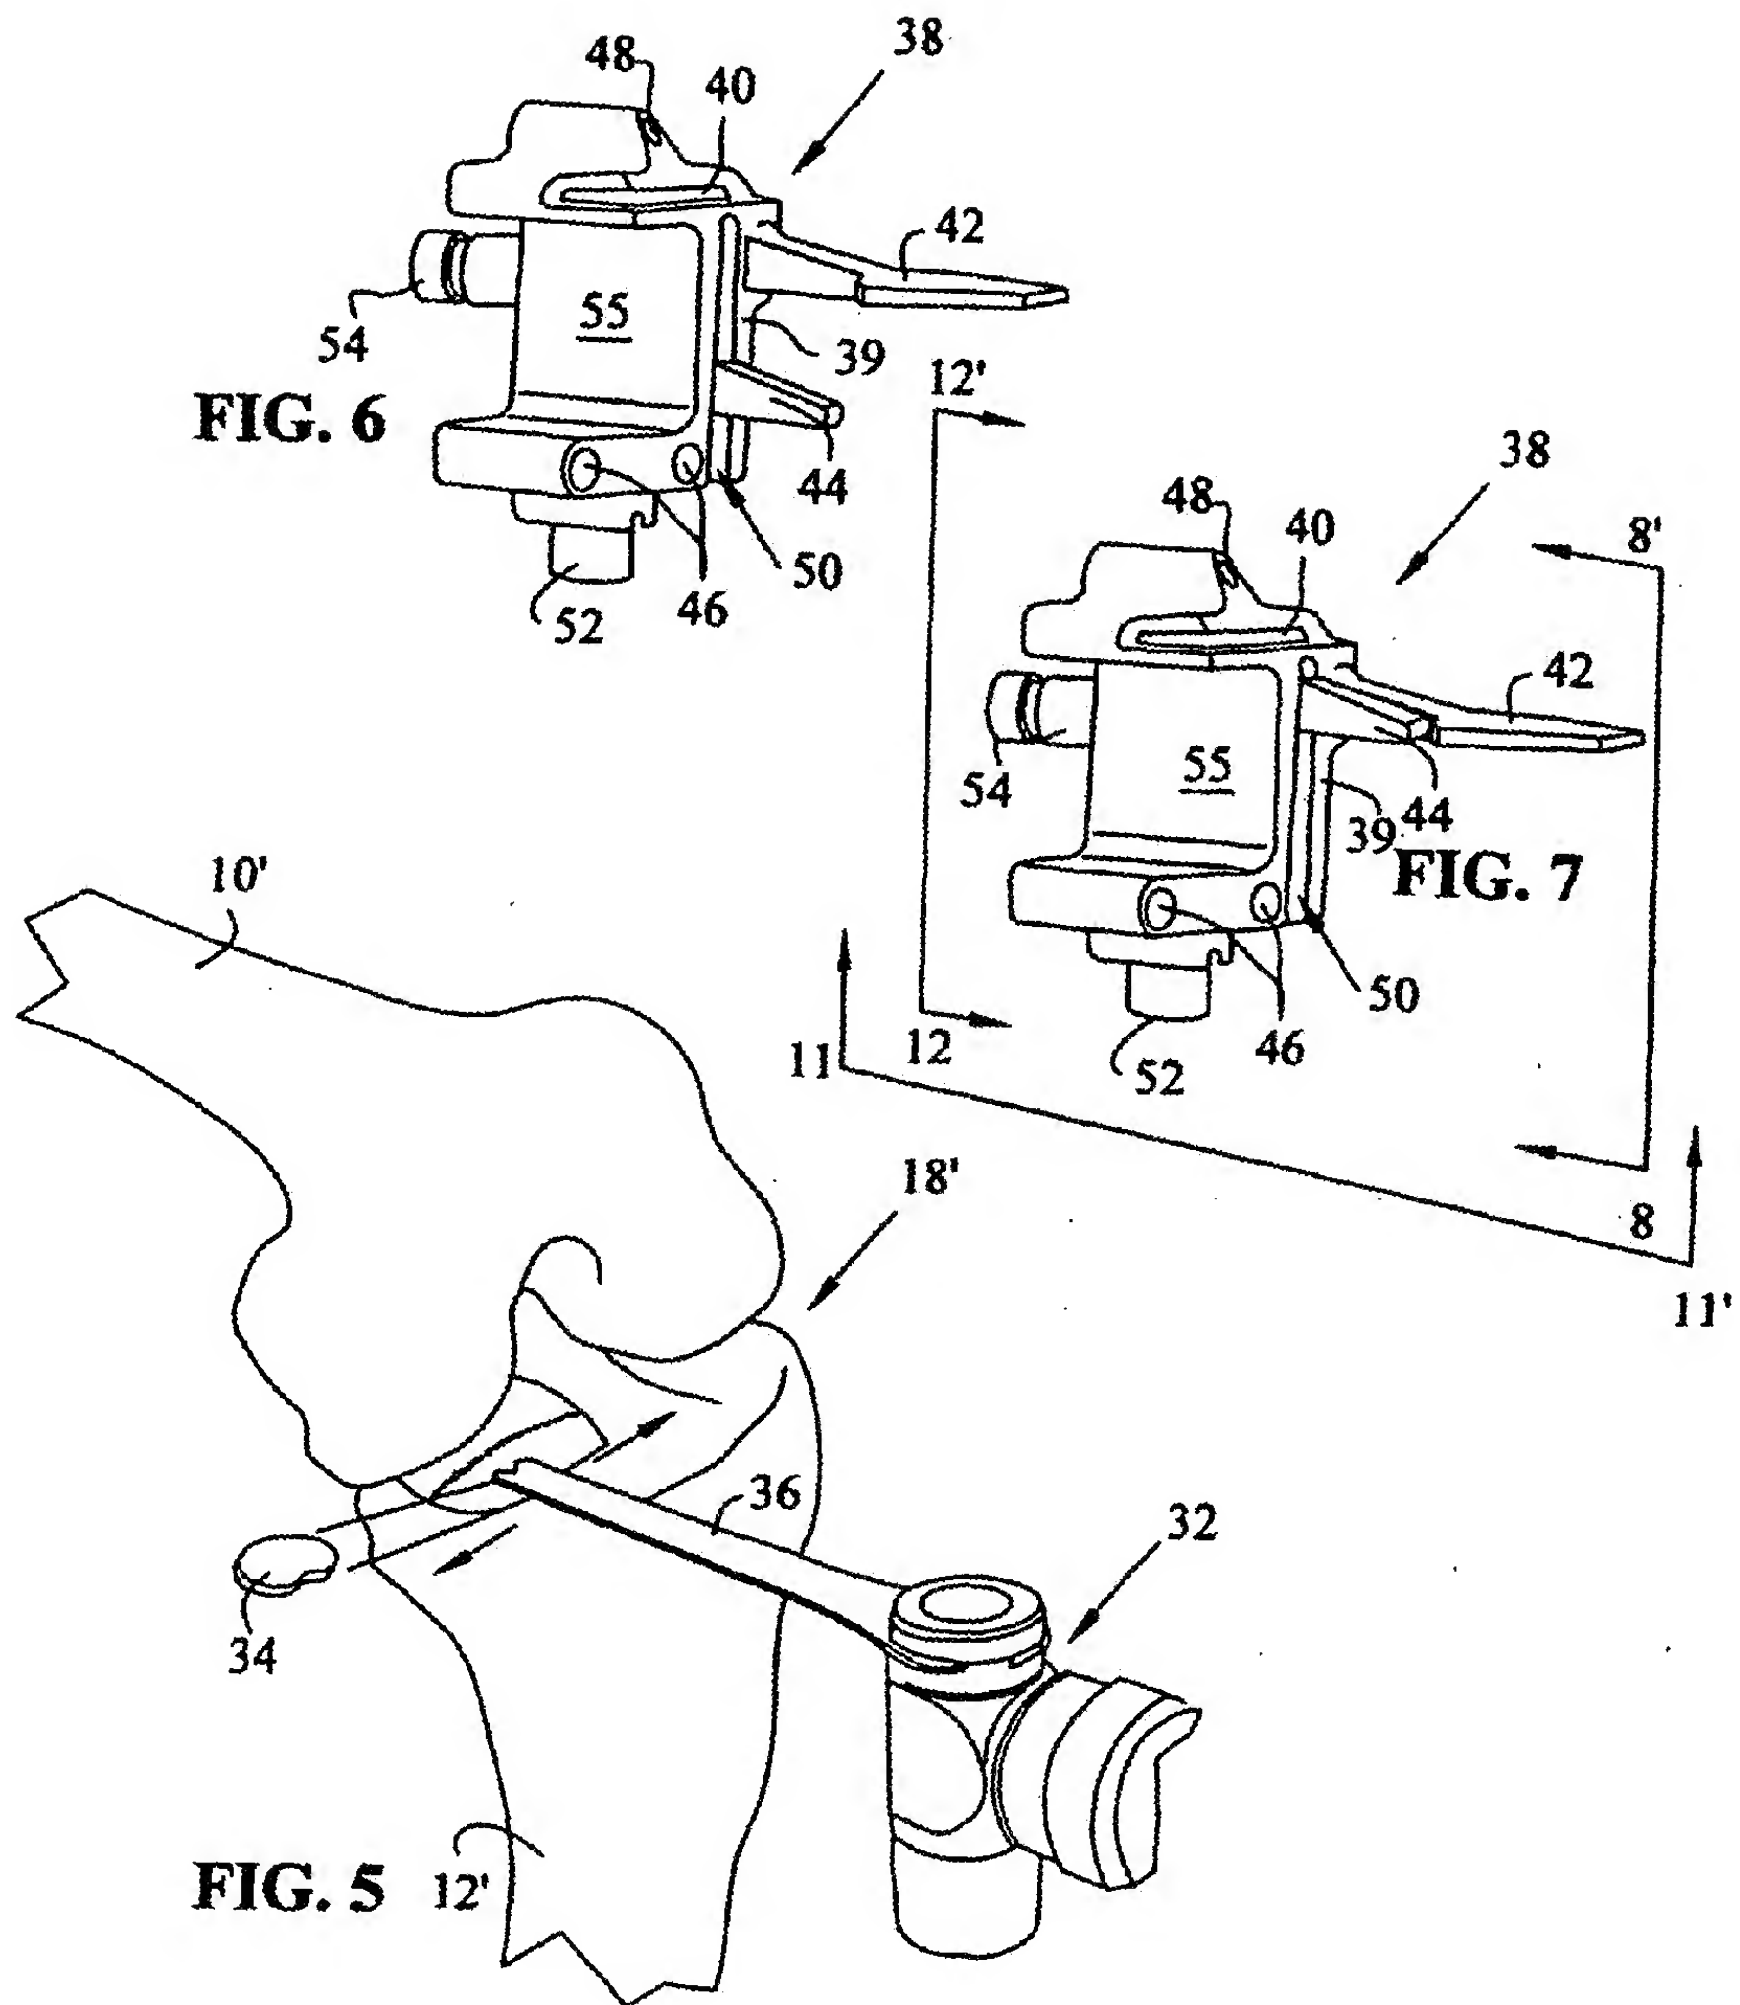
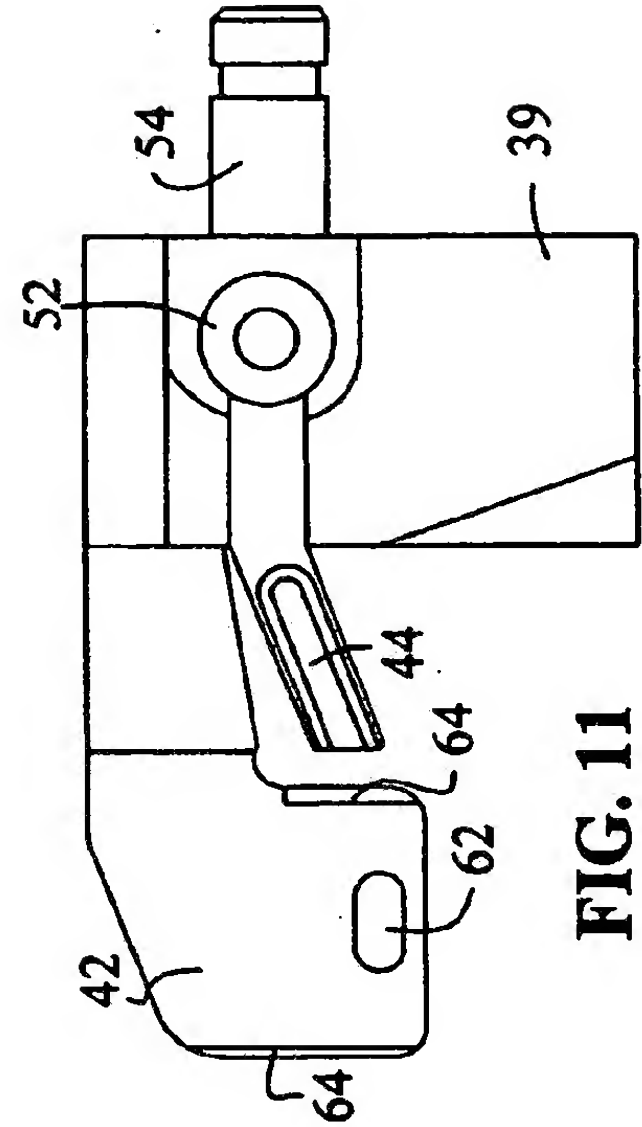
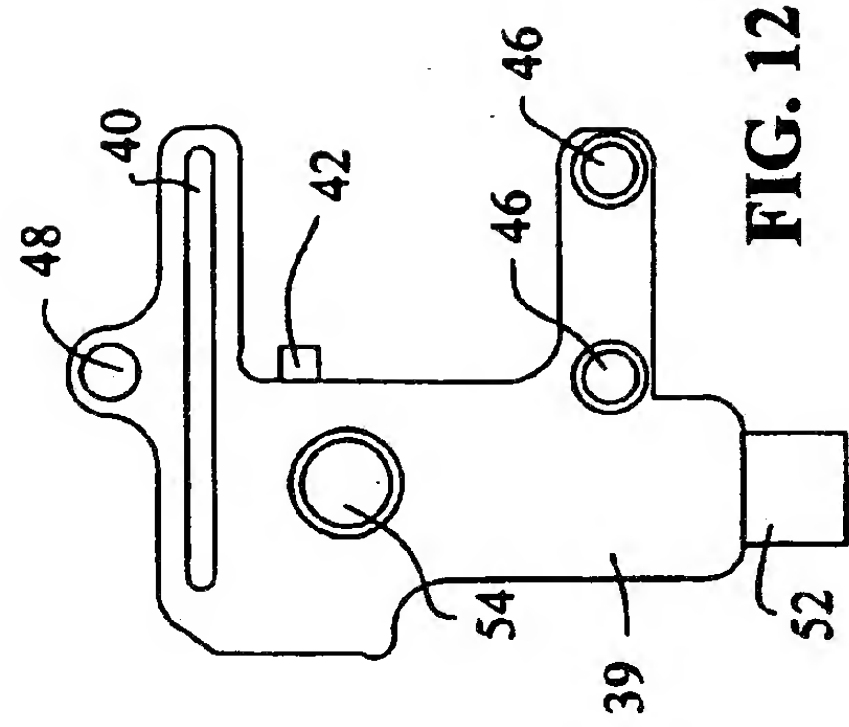
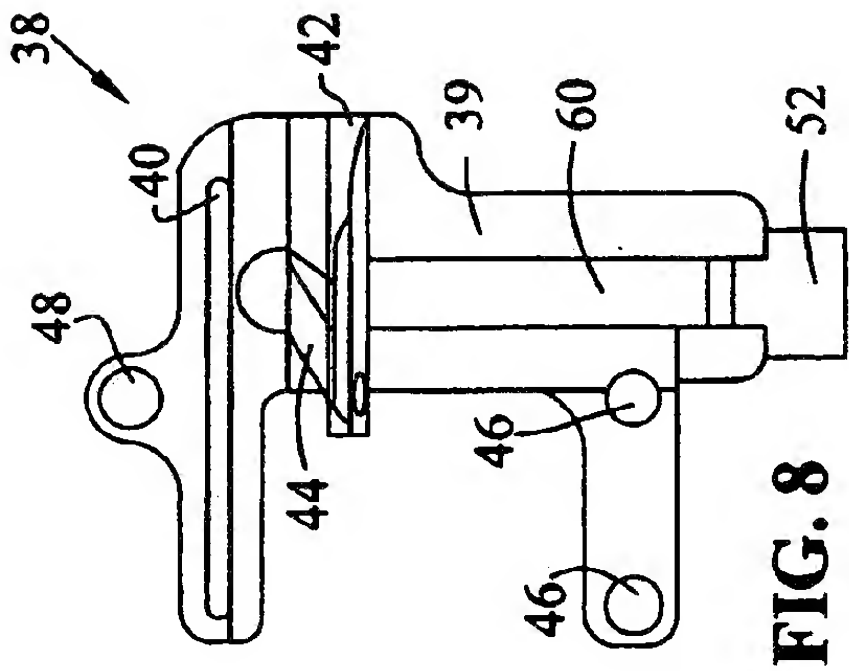
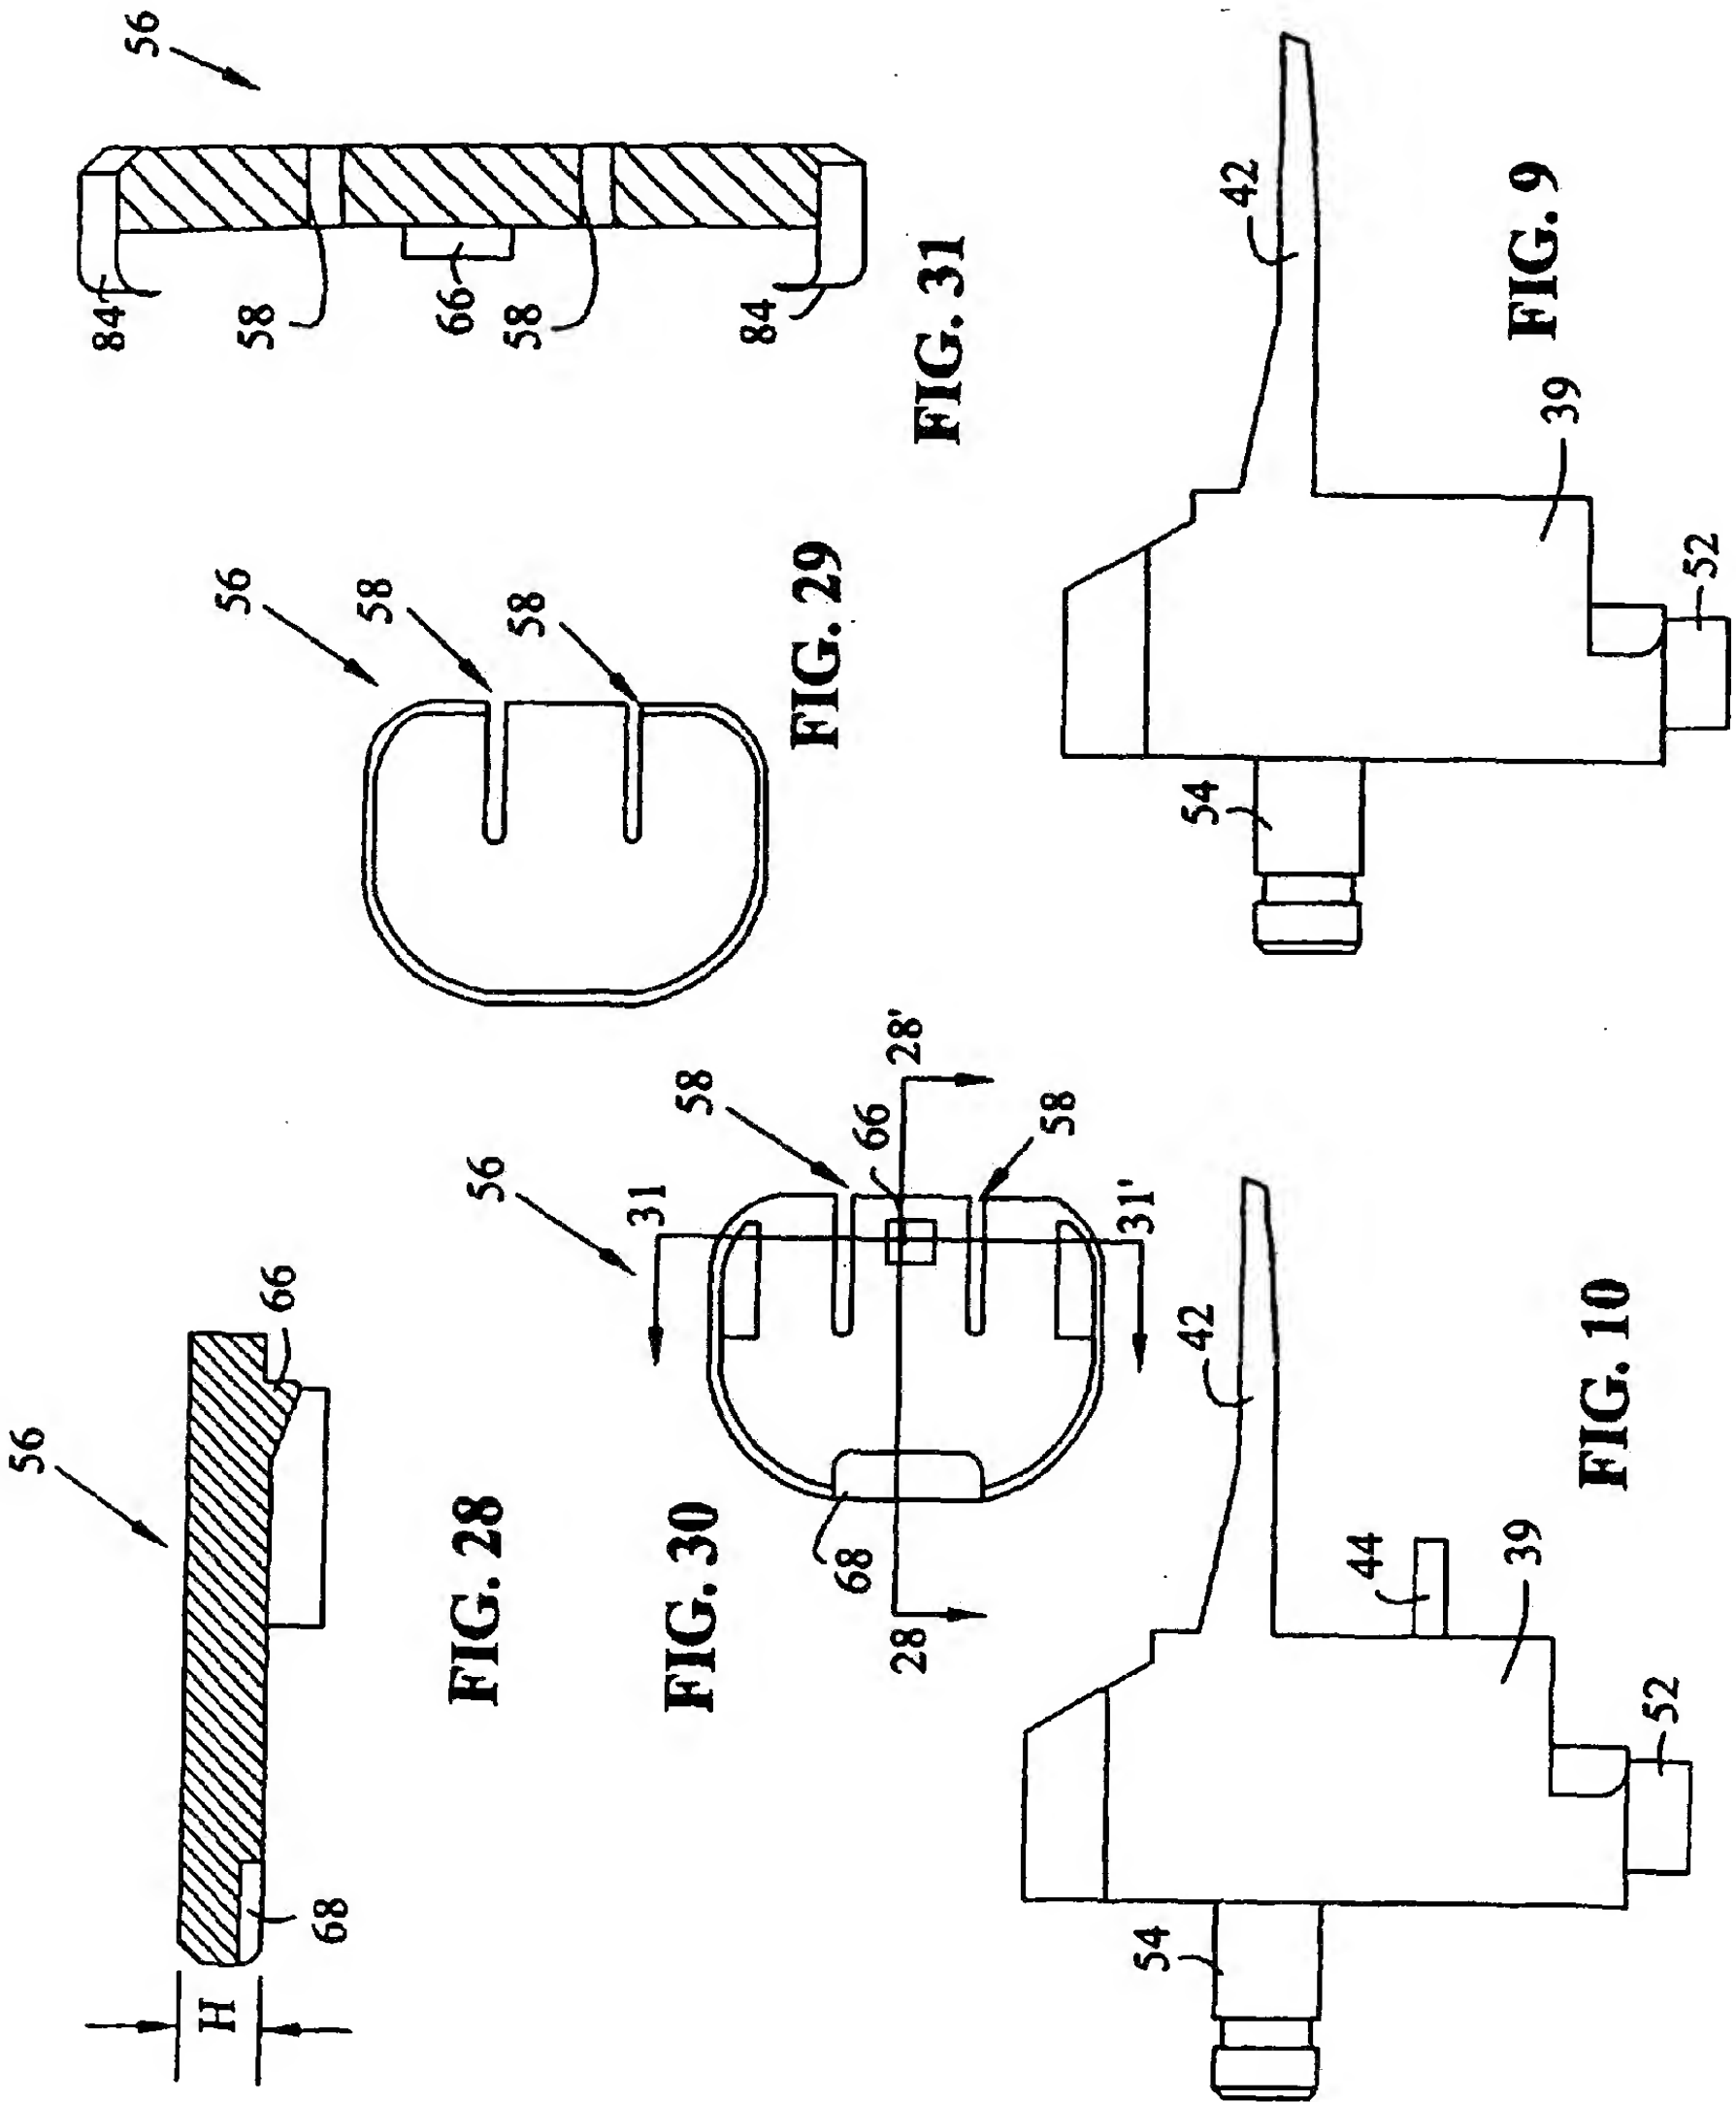
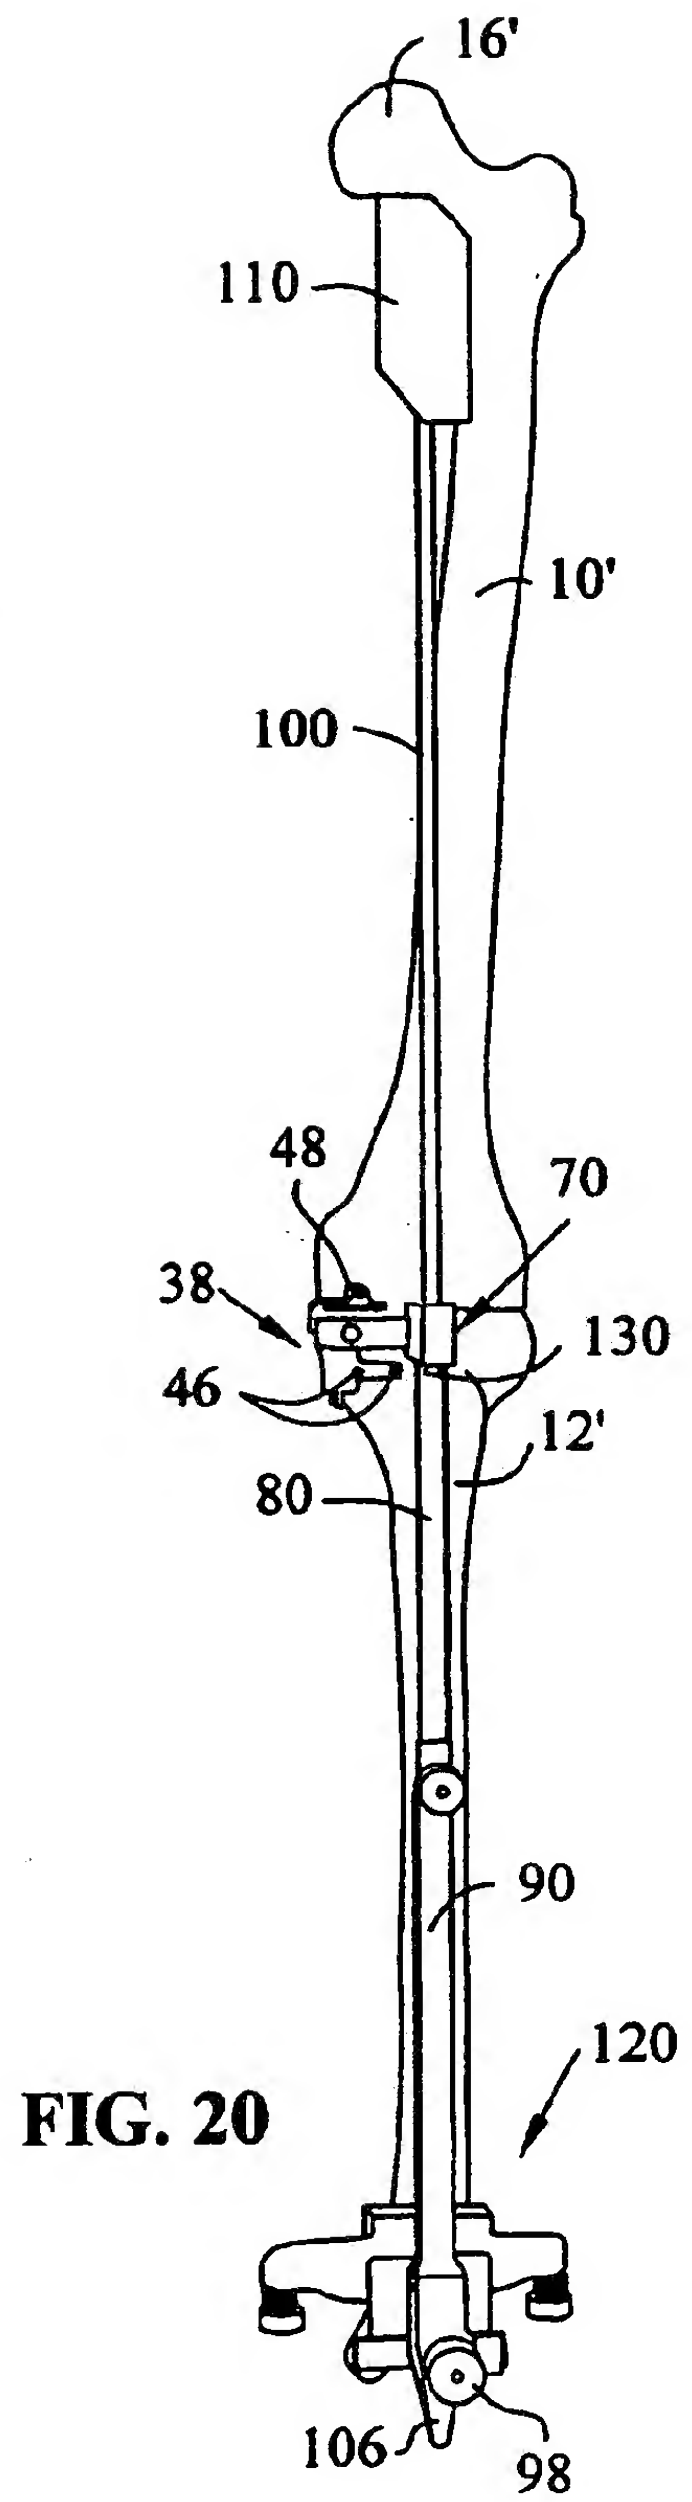
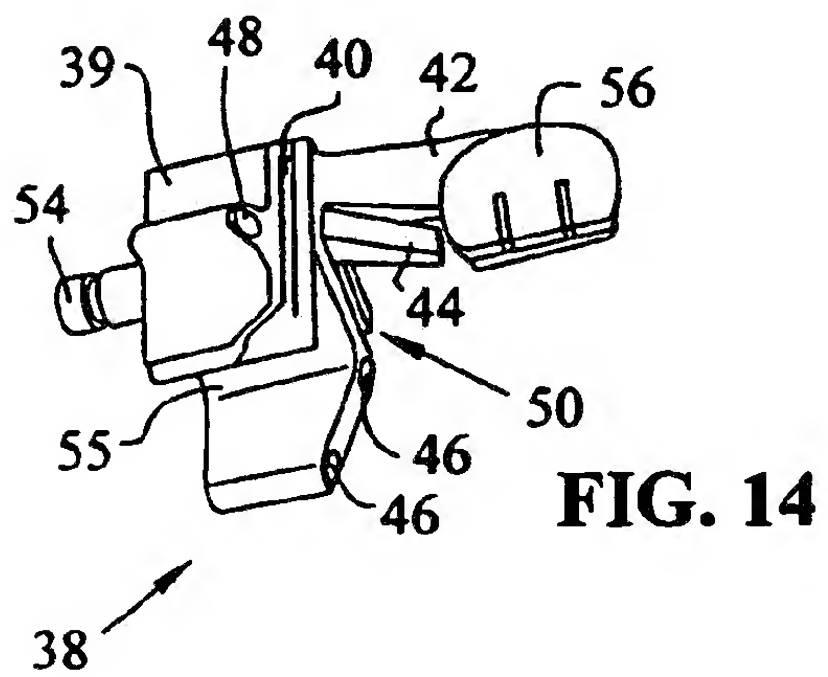
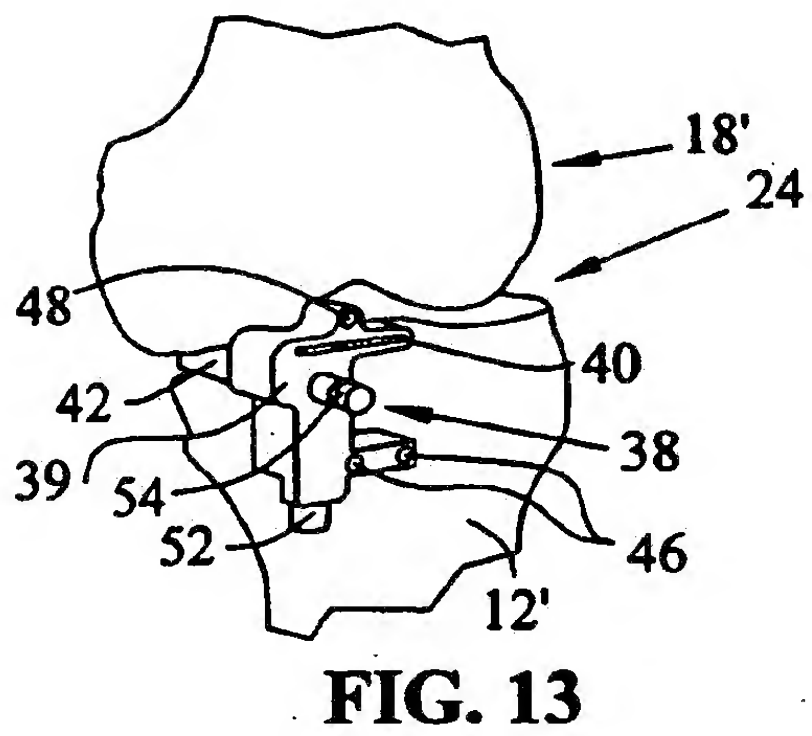
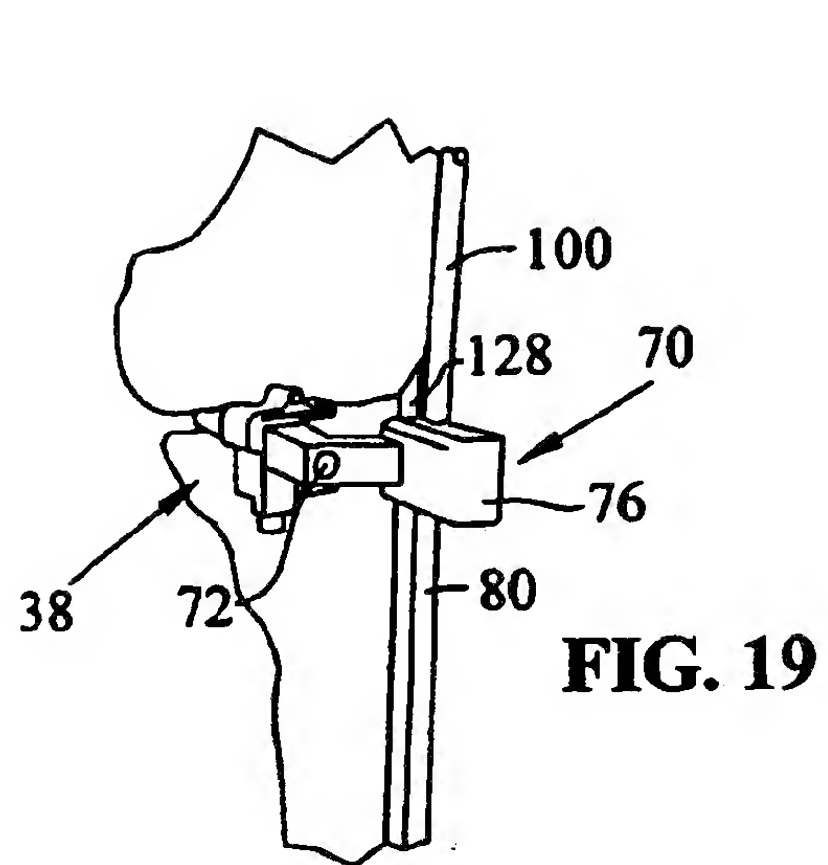


FIG. 4









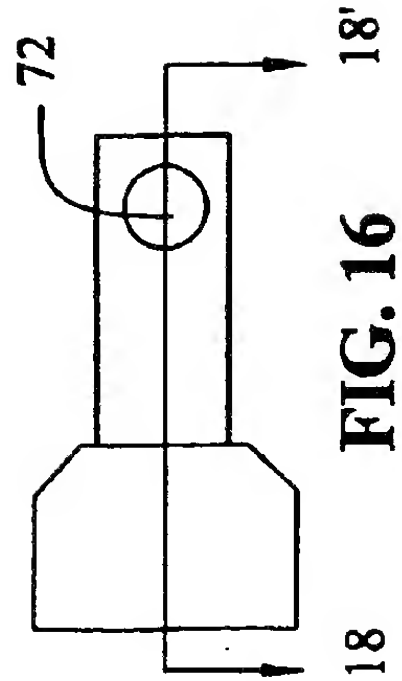


FIG. 15

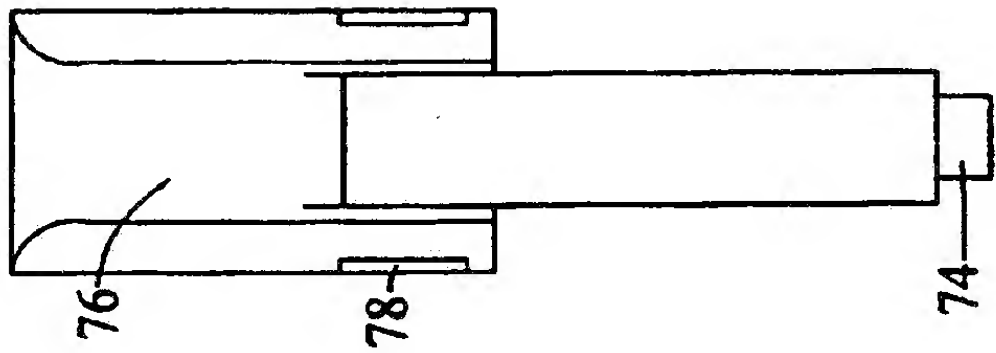


FIG. 16

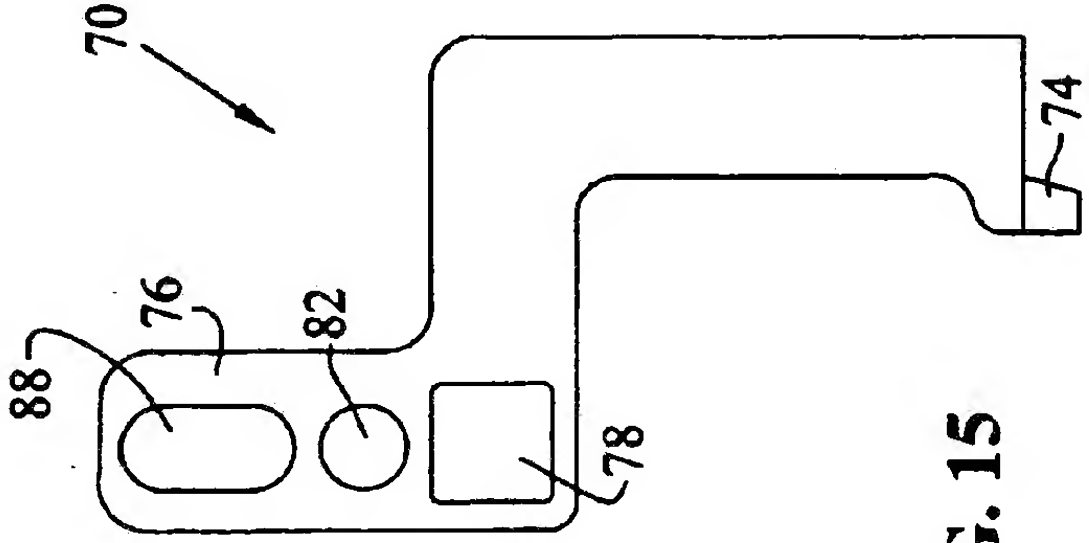


FIG. 17

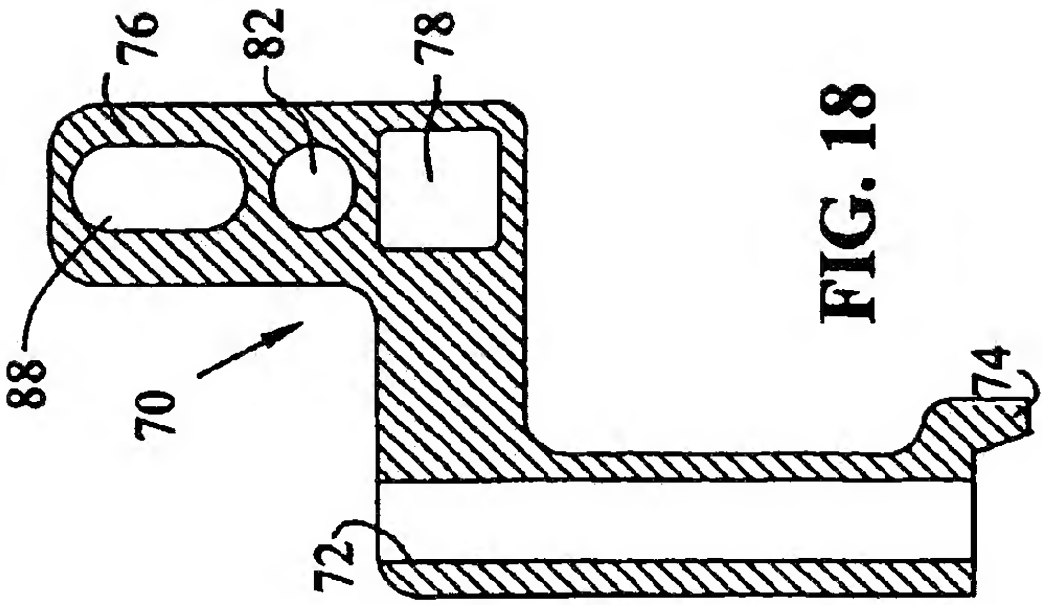
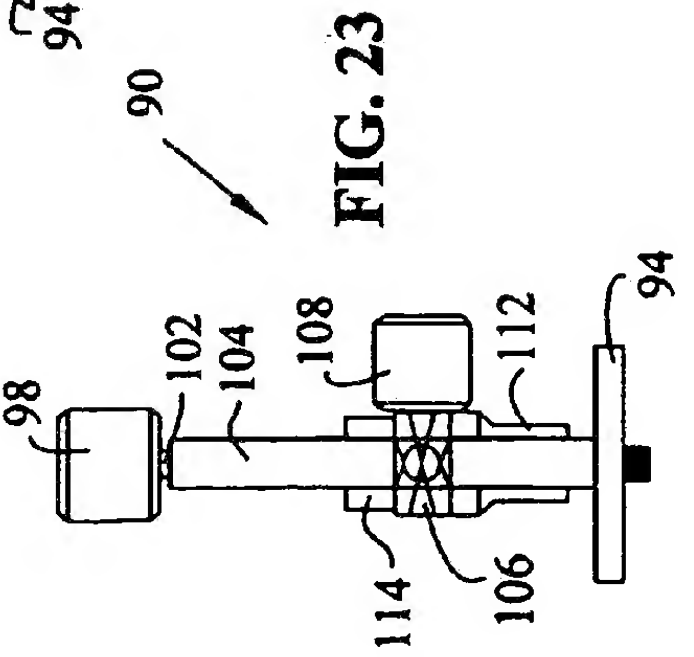
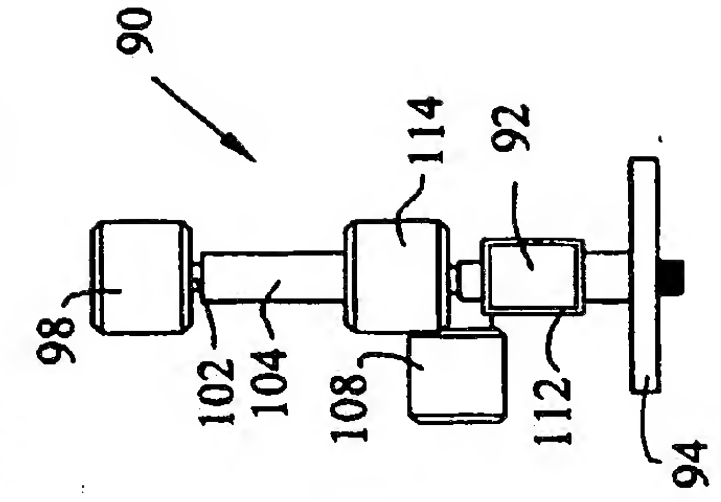
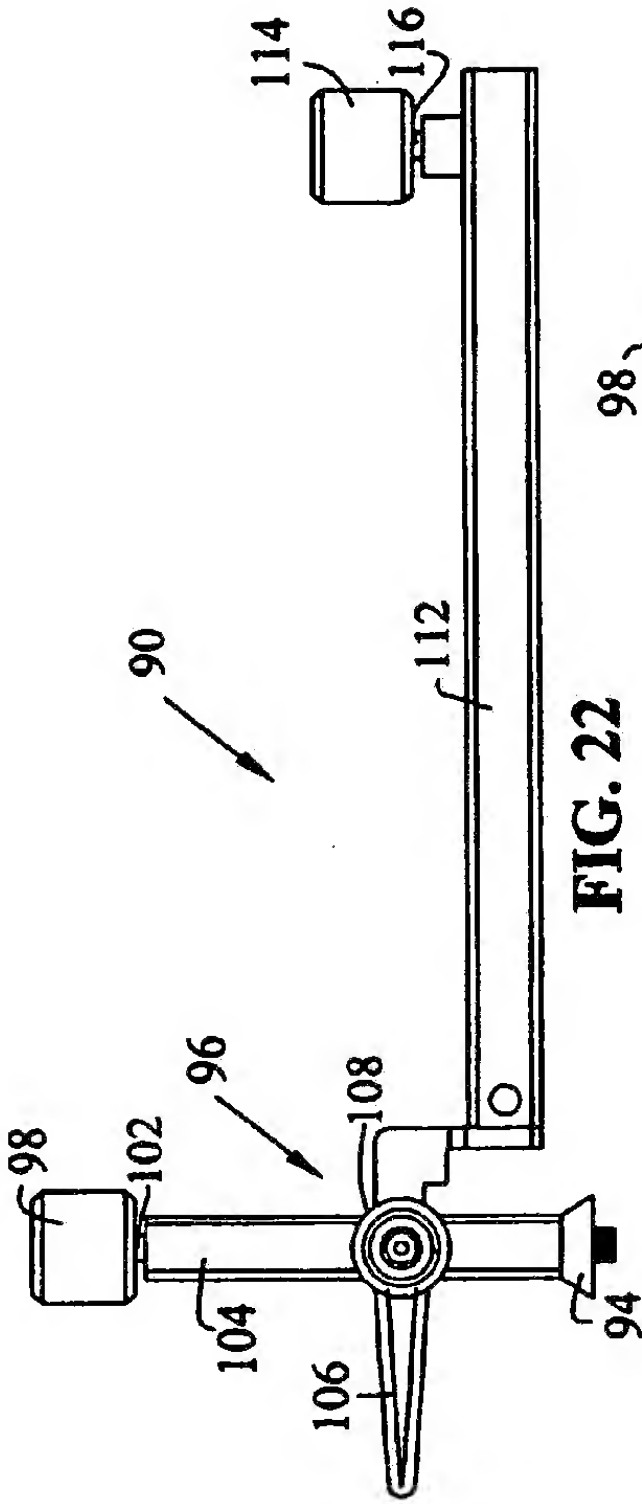
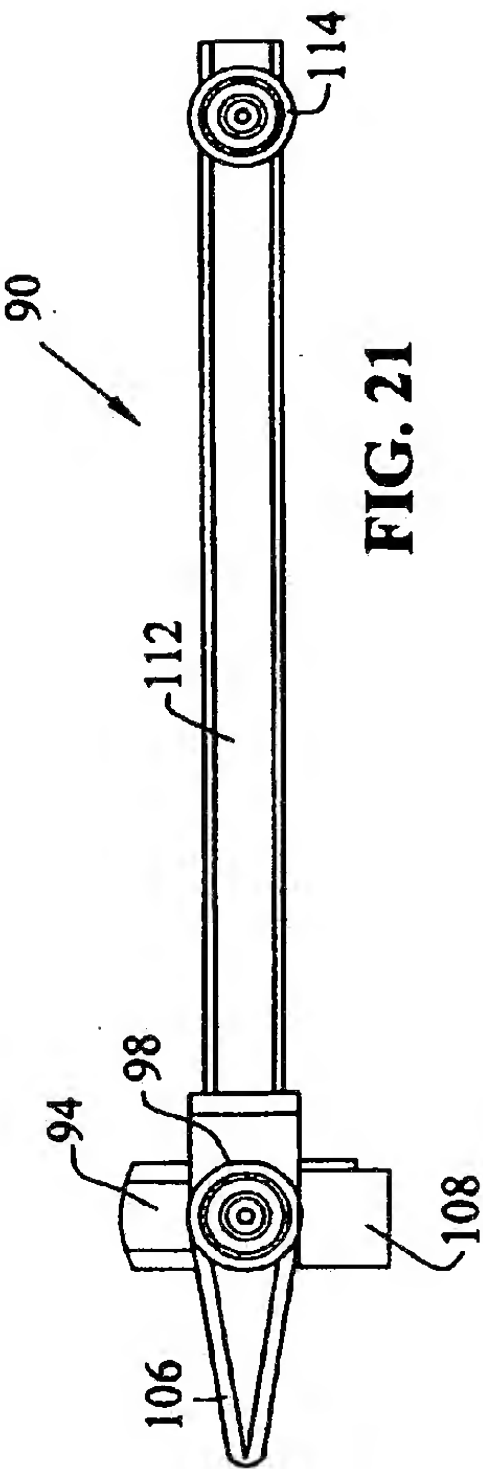
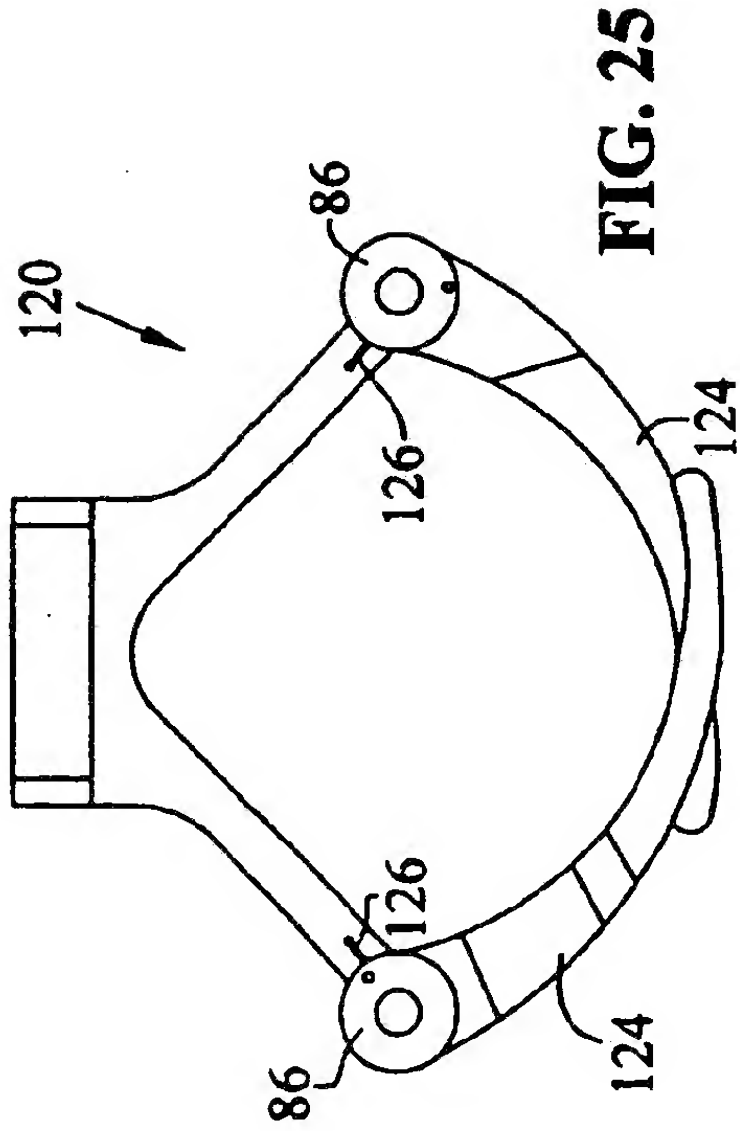
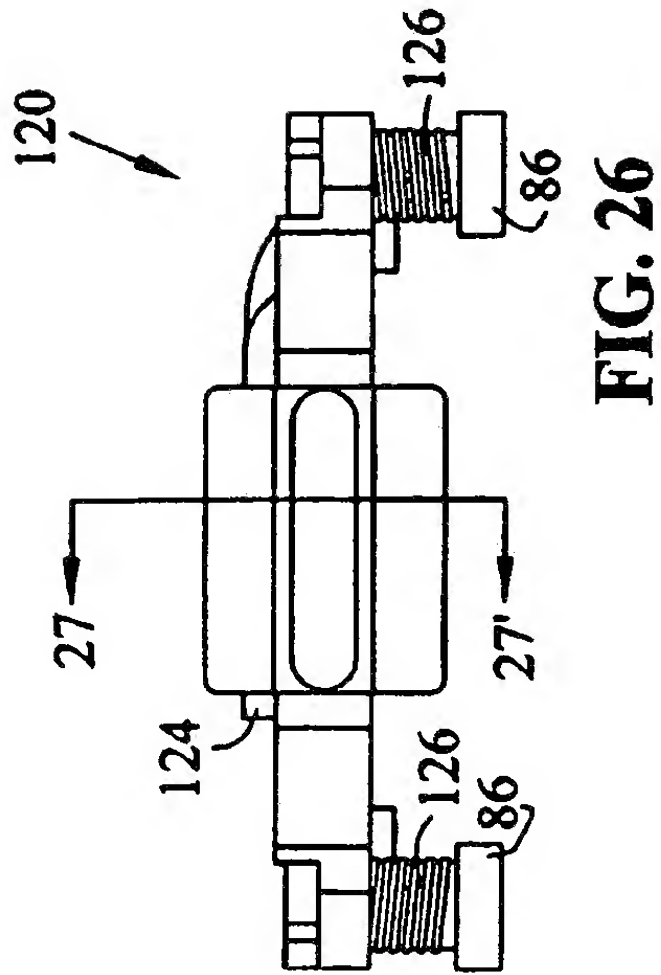
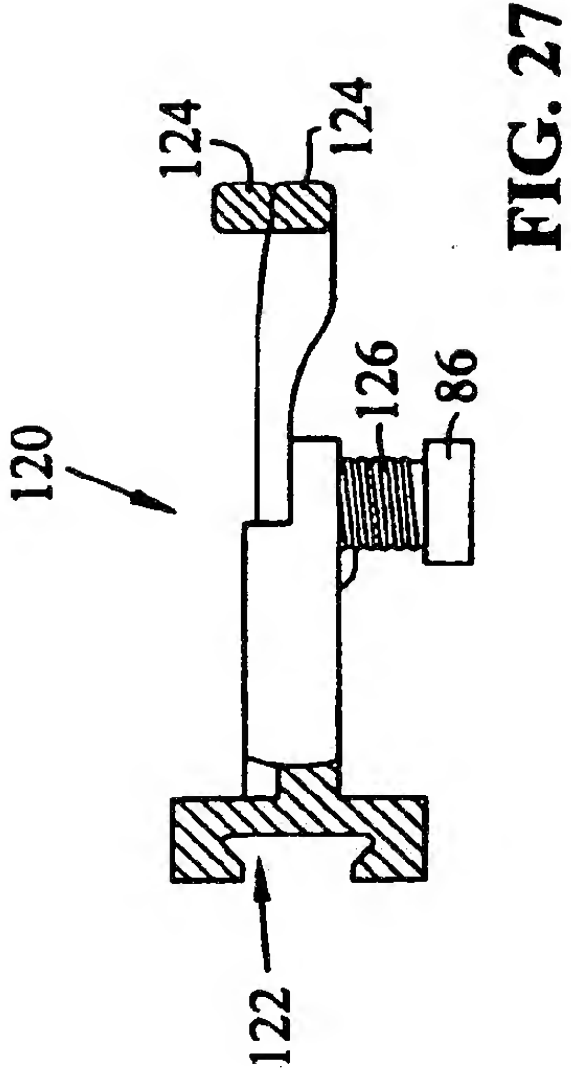
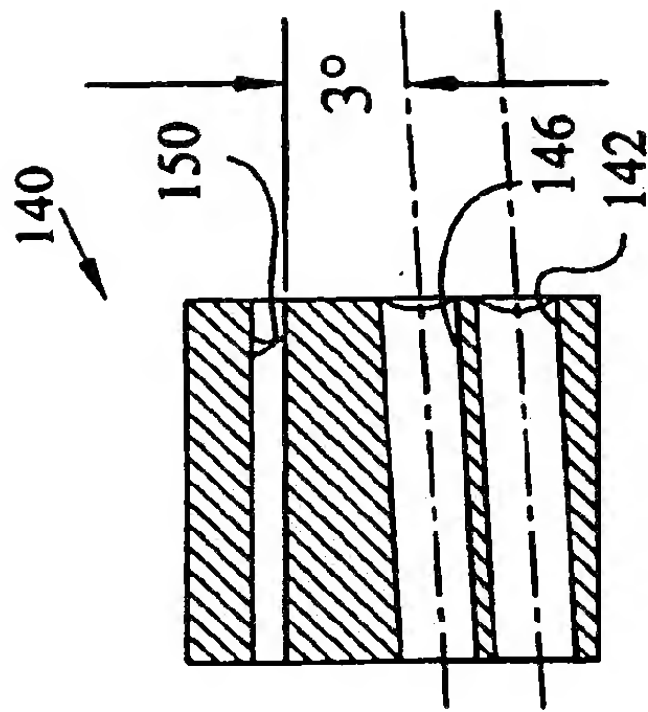
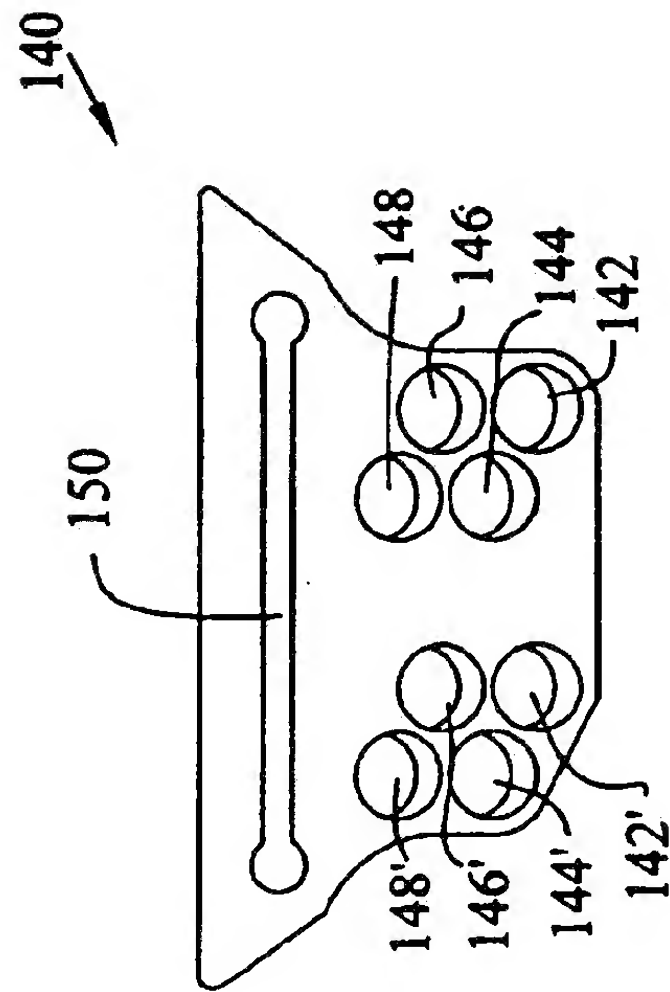
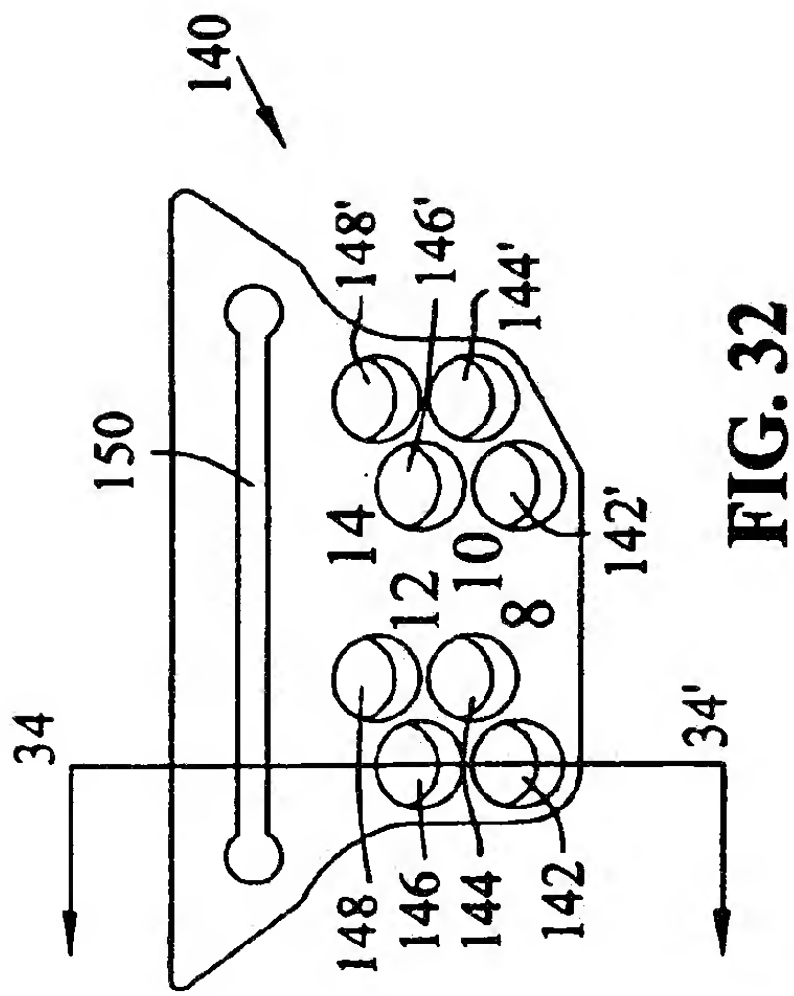
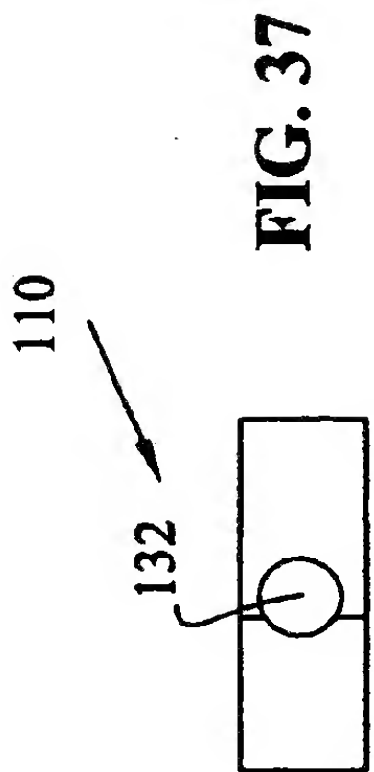
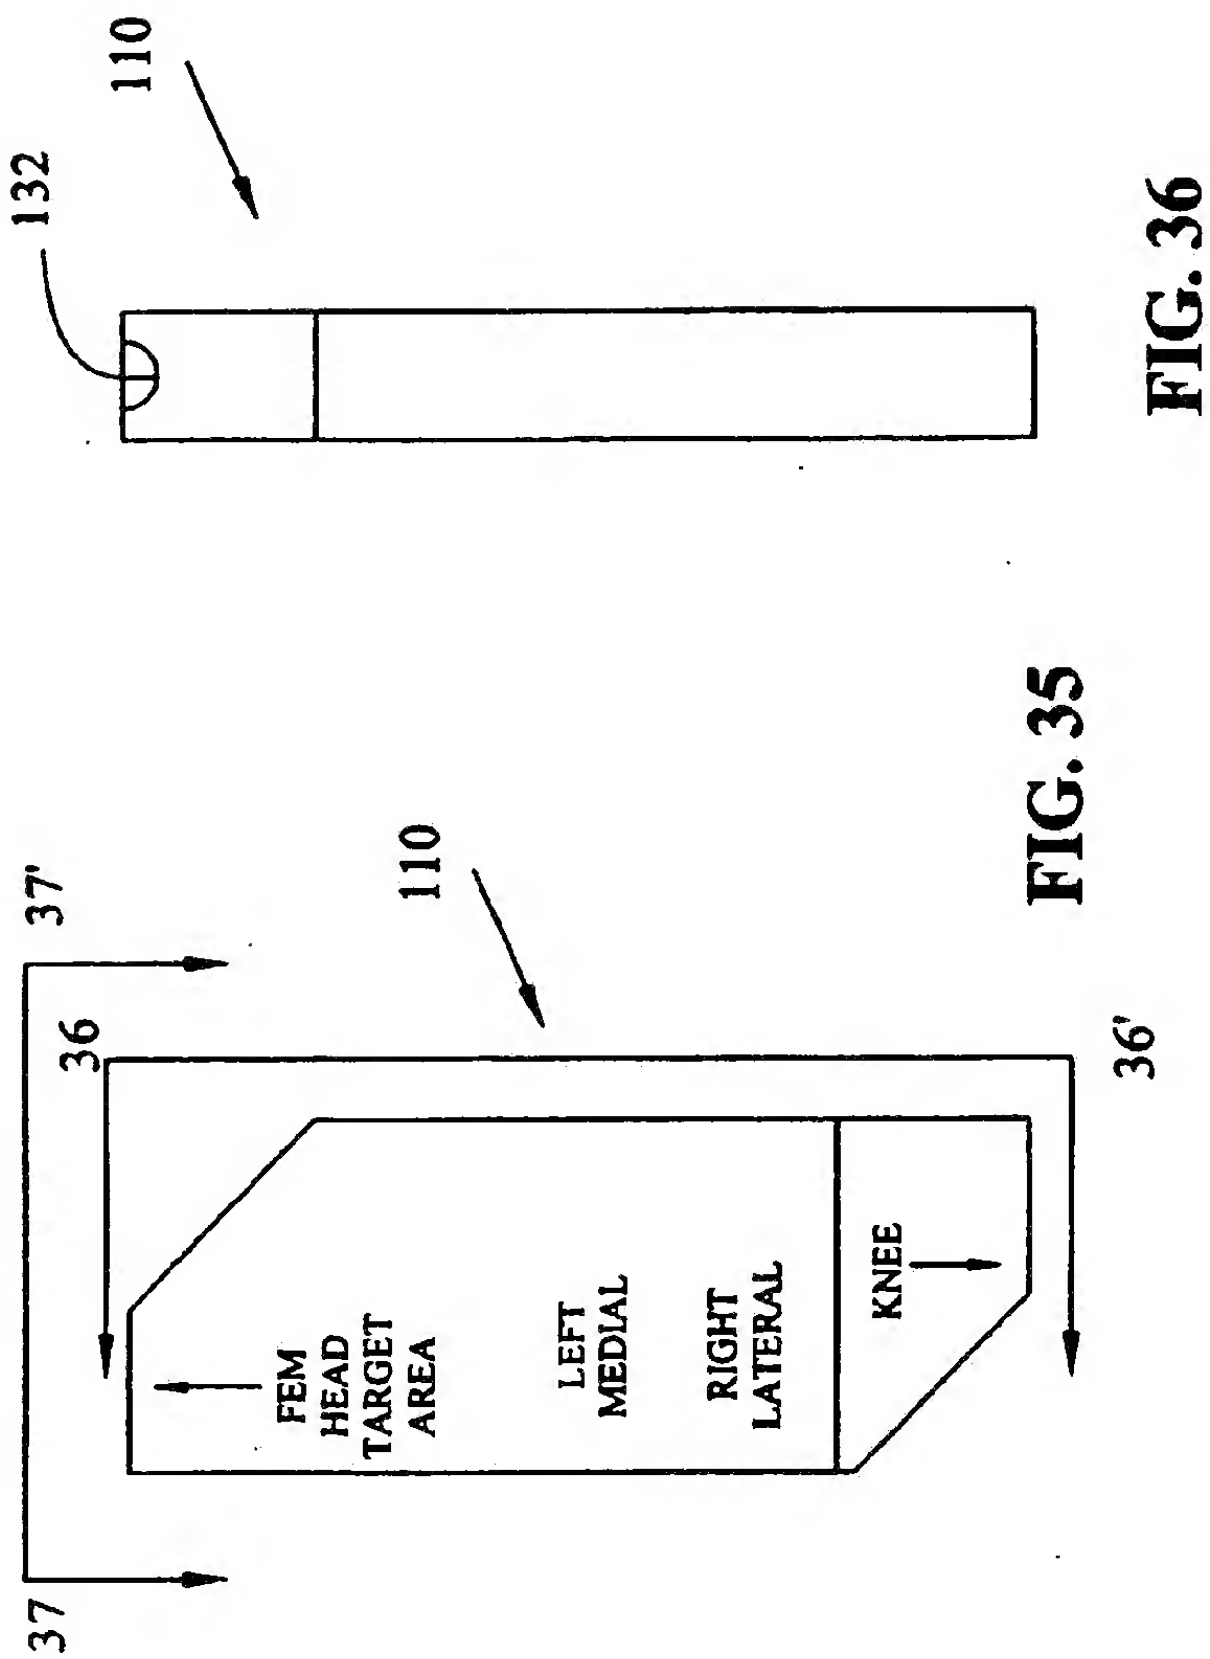


FIG. 18









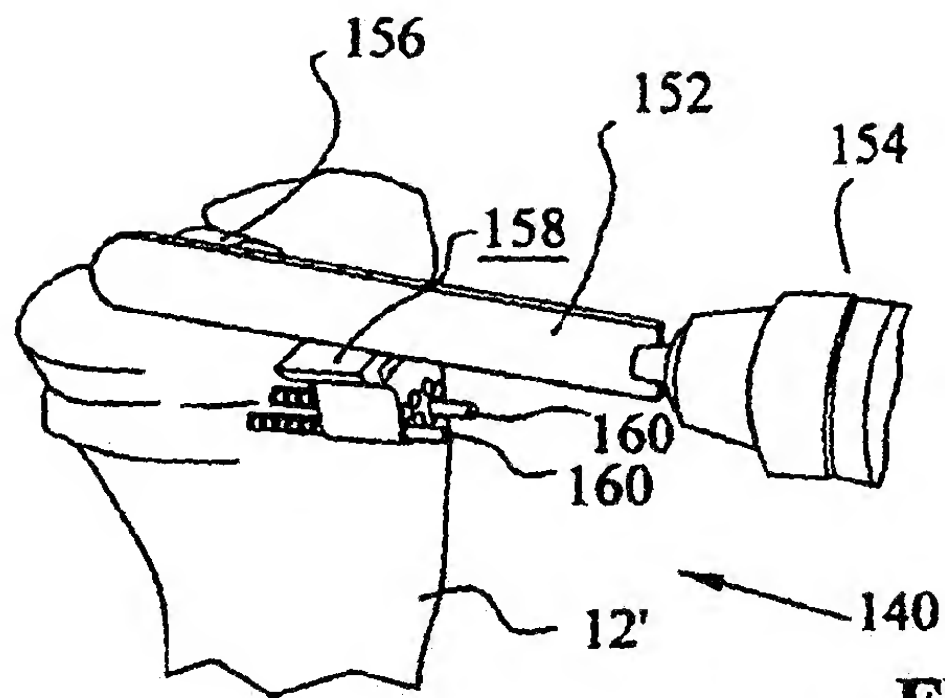


FIG. 38

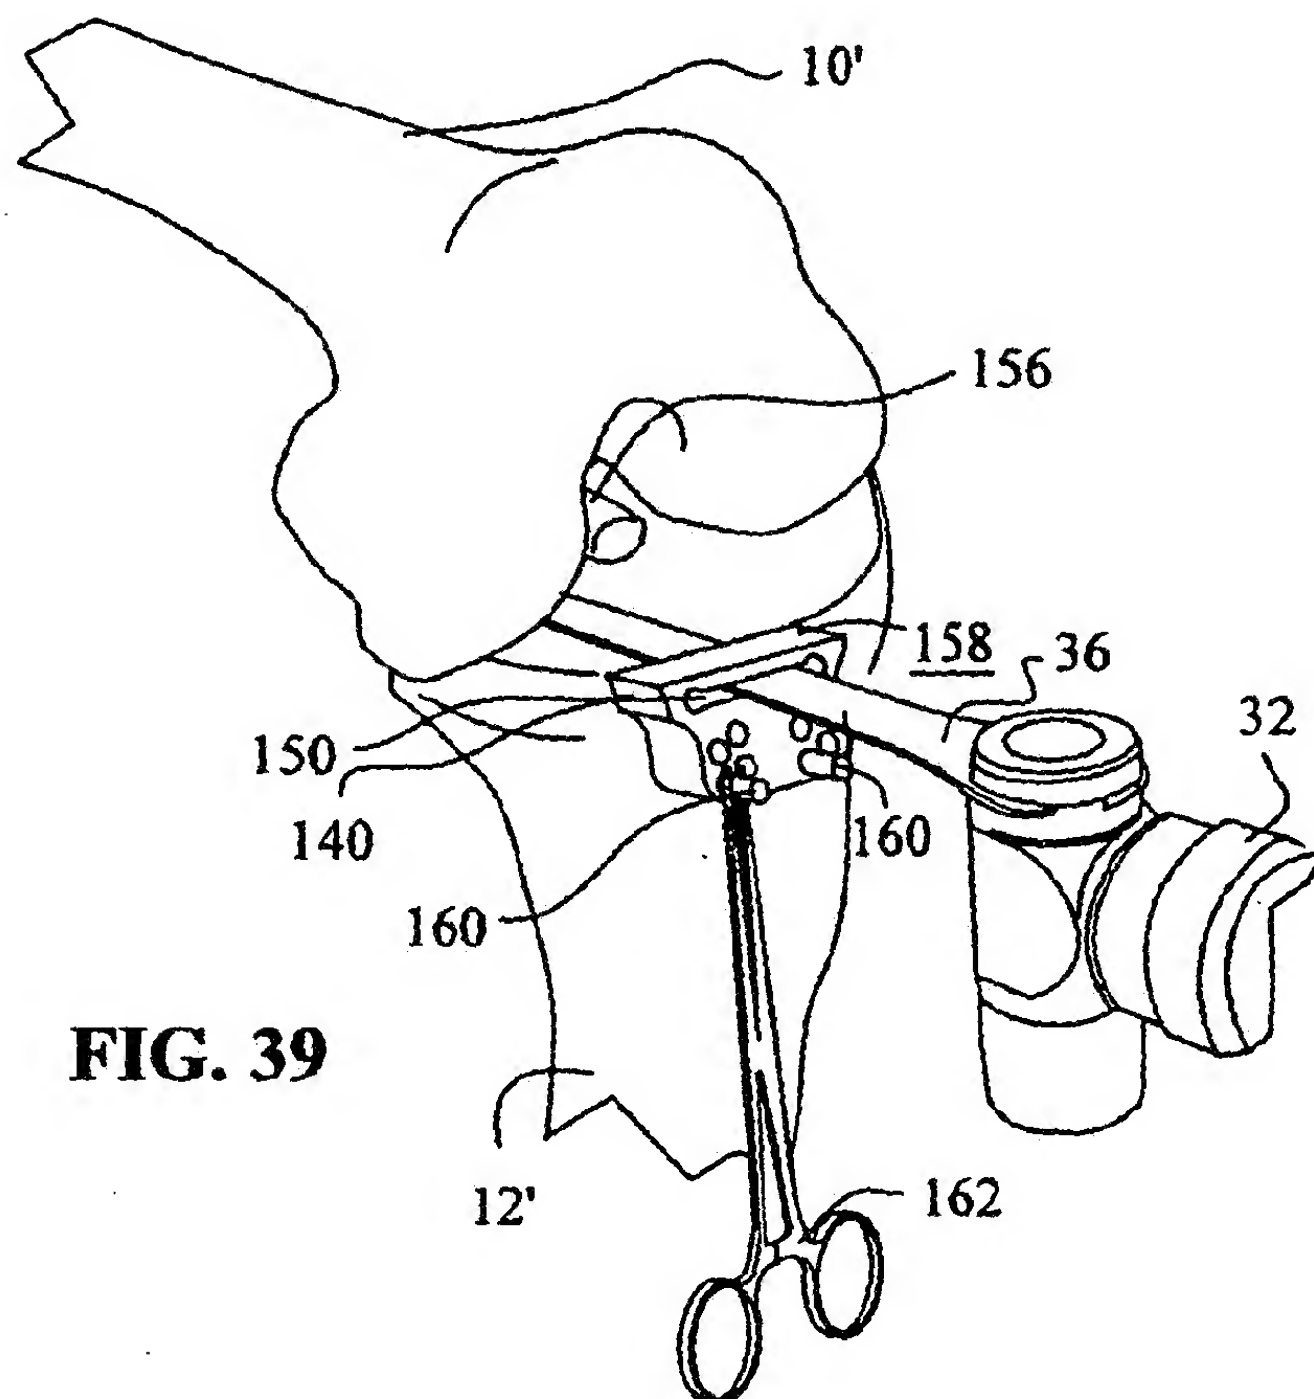


FIG. 39